



WT272C/WT274C

Data Sheet Rev. 1.1

DESCRIPTION

The WT272C/WT274C is a dual/quad low power CMOS operational amplifiers IC. It provides high performance operation at low supply voltages. The basic amplifier can operate at supply voltage as low as 1.2V with very low power consumption and makes it perfect for battery-powered application. The input common-mode voltage extends to the negative rail. The output swings to both rails with light load. The input bias current is inherently low and the input impedance is extremely high. The devices are ideal upgrades for industrial standards OP amp.

FEATURES

- Low Power Replacement for Standard OP Amps
- Wide supply operating range (1.2V to 7V)
- Input common-mode voltage range includes negative rail
- Output swing to rail
- Low input bias current (typical 1pA)
- High input impedance
- Single supply operation
- Internal compensated
- Output short circuit protection

APPLICATIONS



- Portable Instruments
- Battery-Powered Systems
- Transducer Interfacing
- Active Filter
- High Impedance Buffer

ORDERING INFORMATION

Part Number	Package
WT272C-N080	8 pin PDIP
WT272C-S080	8 pin SO

Part Number	Package
WT274C-N140	14 pin PDIP
WT274C-S140	14 pin SO

PIN CONFIGURATION

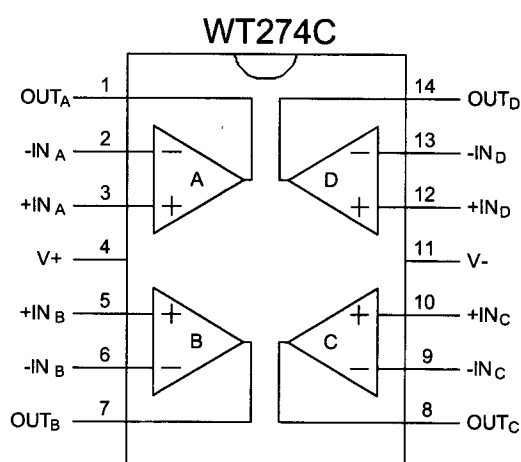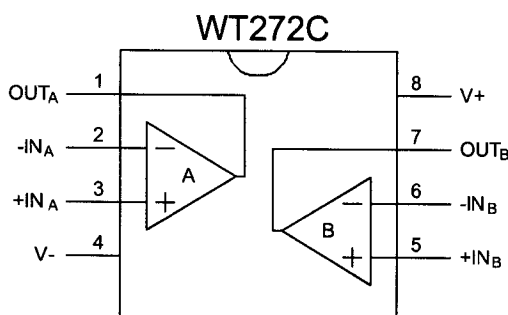

**WT272C/WT274C**

Data Sheet Rev. 1.1

ABSOLUTE MAXIMUM RATINGS

Parameter	Min.	Max.	Units
DC supply voltage (V_+ - V_-)	0	8.5	V
Input and output voltage	$V_- - 0.3$	$V_+ + 0.3$	V
Storage temperature	-65	150	$^{\circ}\text{C}$
Ambient temperature with power applied	-20	100	$^{\circ}\text{C}$
Duration of output short circuit		Unlimited	

*Note: Stresses above those listed may cause permanent damage to the devices

RECOMMENDED OPERATING CONDITION

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
V_{SUPPLY}	Supply Voltage		1.2		7	V
I_{SOURCE}	Output Source Current				5	mA
I_{SINK}	Output Sink Current				9	μA
T_a	Ambient Temperature		0		85	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS(V₊ = 5V, V₋ = 0V, T_a = +25 $^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
V_{OS}	Input Offset Voltage			2	5	mV
$\Delta V_{\text{OS}}/\Delta T$	Average Temperature Coefficient of Input Offset Voltage			0.7		$\mu\text{V}/^{\circ}\text{C}$
I_{OS}	Input Offset Current			1		pA
I_{BIAS}	Input Bias Current	T _a =25 $^{\circ}\text{C}$		1		pA
V_{ICOM}	Input Common Mode Voltage		0		V ₊ -1.3	V
V_{OUT}	Output Voltage Swing	V _{in} = 10mV R _L = 1M Ω connected to V ₋	4.9	4.99		V
		V _{in} = 10mV R _L = 100K Ω connected to V ₋		4.95		V
		V _{in} = 10mV R _L = 10K Ω connected to V ₋		4.75		V
		V _{in} = -10mV R _L = 1M Ω , connected to V ₊		0.5	0.7	V
		V _{in} = -10mV R _L = 100K Ω connected to V ₊		0.65		V
A_{VOL}	Large Signal Voltage Gain	V _O = 1V to 4V, V _i = 1.4V R _L = 1M Ω	20	100		V/mV
GBW	Unit Gain Bandwidth	R _L = 1M Ω , C _L = 50pF		0.1		MHz
CMRR	Common Mode Rejection Ratio	V _O = 1V, V _i = 0 to 3.5V	60	80		dB
PSRR	Power Supply Rejection Ratio	V _O = 1V	60	90		dB
SR	Slew Rate	A _{VOL} = 1, C _L = 100pF V _{IN} = 5V _{P-P}		0.03		V/ μs
I_{SUPPLY}	Supply Current (per amplifier)			5	9	μA
ϕ_m	Phase Margin at Unit Gain	R _L = 1M Ω , C _L = 50pF		55		Degree
e _n	Input Equivalent Noise Voltage	f = 1KHz, R _s = 100 Ω		50		nV/ $\sqrt{\text{Hz}}$
V _{O1} /V _{O2}	Channel Separation	A _{VOL} = 100		120		dB




WT272C/WT274C


Data Sheet Rev. 1.1

TYPICAL APPLICATION CIRCUIT

Voltage Follower

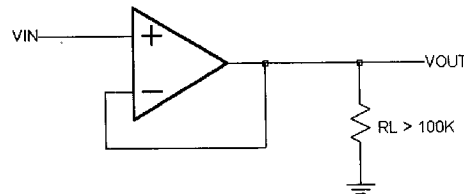

Instrument Amplifier

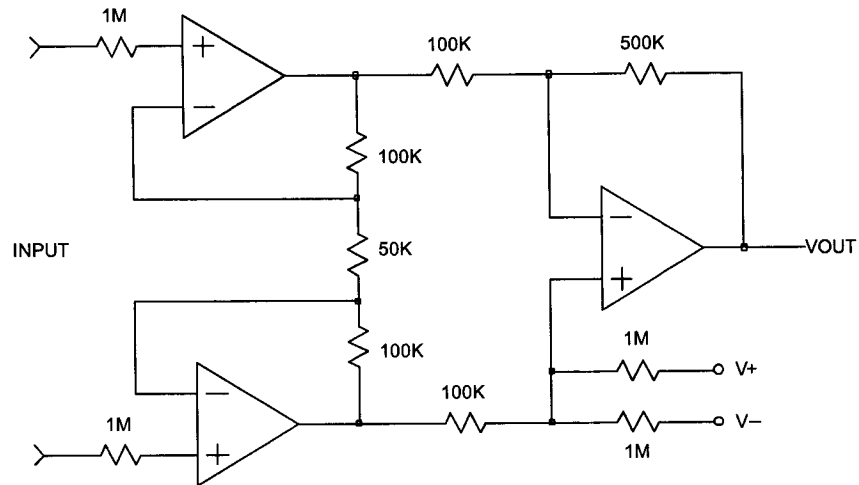

深圳市商斯达实业有限公司荣誉出品

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

中国传感器科技信息网：HTTP://WWW.SENSOR-IC.COM/

工控安防网：HTTP://WWW.PC-PS.NET/

消费电子专用电路网：HTTP://WWW.SUNSTARE.COM/

E-MAIL：xjr5@163.com szss20@163.com

MSN：suns8888@hotmail.com

QQ：195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83338339 邮编：518033 手机：(0)13902971329

深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX：
0755-83665529 25059422

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376