

Interactive Catalog Replaces Catalog Pages

Honeywell Sensing and Control has replaced the PDF product catalog with the new **Interactive Catalog**. The **Interactive Catalog** is a power search tool that makes it easier to find product information. It includes more installation, application, and technical information than ever before.

These PDF files are no longer being updated and will be removed by January 2001.



**Click this icon to try the new
Interactive Catalog.**

Sensing and Control

Honeywell Inc.

11 West Spring Street
Freeport, Illinois 61032




SUNSTAR INC. <http://www.sunstar-ic.com/> TEL: 0755-83376489 FAX:0755-83376182 E-MAIL:szss20@163.com

Humidity Sensors

Relative Humidity

SUNSTAR 传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com

HHH Series



FEATURES

- Linear voltage output vs %RH
- Laser trimmed interchangeability
- Low power design
- High accuracy
- Fast response time
- Stable, low drift performance
- Chemically resistant

TYPICAL APPLICATIONS

- Refrigeration
- Drying
- Meteorology
- Battery-powered systems
- OEM assemblies

GENERAL INFORMATION

The HIH-3605 monolithic IC (Integrated Circuit) humidity sensor is designed specifically for high volume OEM (Original Equipment Manufacturer) users. Direct input to a controller or other device is made possible by this sensor's linear voltage output. With a typical current draw of only 200 μ A, the HIH-3605 is ideally suited for low drain, battery powered systems.

The HIH-3605 delivers instrumentation quality RH sensing performance in a low cost, solderable SIP (Single In-line Package). Available in two lead spacing configurations, the RH sensor is a laser trimmed thermoset polymer capacitive sensing element with on-chip integrated signal conditioning.

ORDER GUIDE


Catalog Listing	Description
HIH-3605-A	Integrated circuit humidity sensor, 0.100 in. lead pitch SIP
HIH-3605-A-CP	Integrated circuit humidity sensor, 0.100 in. lead pitch SIP with calibration and data printout
HIH-3605-B	Integrated circuit humidity sensor, 0.050 in. lead pitch SIP
HIH-3605-B-CP	Integrated circuit humidity sensor, 0.050 in. lead pitch SIP with calibration and data printout.

NIST CALIBRATION

HIH-3605 sensors may be ordered with a NIST calibration and sensor specific data printout. Append "-CP" to the model number to order.


RH SENSOR CONSTRUCTION

Sensor construction consists of a planar capacitor with a second polymer layer to protect against dirt, dust, oils and other hazards.

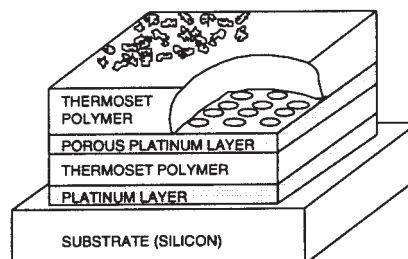

MOUNTING DIMENSIONS (for reference only)

HIH-3605-A HIH-3605-B

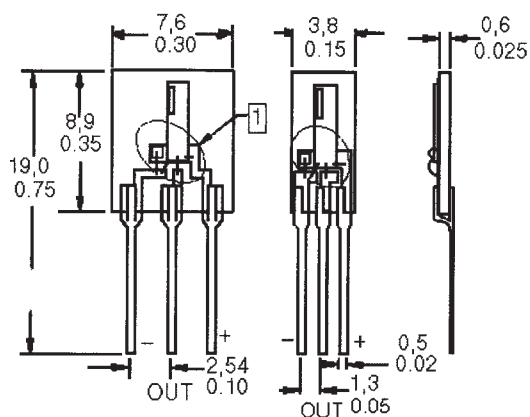

[1] Protective Sealant

CAUTION

PRODUCT DAMAGE

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation, take normal ESD precautions when handling this product.


Humidity

PERFORMANCE SPECIFICATIONS


Parameter	Conditions
RH Accuracy ⁽¹⁾	±2% RH, 0-100% RH non-condensing, 25°C, V _{supply} = 5 VDC
RH Interchangeability	±5% RH, 0-60% RH; ±8% @ 90% RH typical
RH Linearity	±0.5% RH typical
RH Hysteresis	±1.2% of RH span maximum
RH Repeatability	±0.5% RH
RH Response Time, 1/e	15 sec in slowly moving air at 25°C
RH Stability	±1% RH typical at 50% RH in 5 years
Power Requirements	
Voltage Supply	4 to 5.8 VDC, sensor calibrated at 5 VDC
Current Supply	200 µA at 5 VDC, 2 mA typical at 9 VDC
Voltage Output	V _{out} = V _{supply} (0.0062 (Sensor RH) + 0.16), typical @ 25°C (Data printout provides a similar, but sensor specific, equation at 25°C.)
V _{supply} = 5 VDC	0.8 to 3.9 VDC output @ 25°C typical
Drive Limits	Push/pull symmetric; 50 µA typical, 20 µA minimum, 100 µA maximum Turn-on ≤0.1 second
Temp. Compensation	True RH = (Sensor RH)/(1.093-0.0012T), T in °F True RH = (Sensor RH)/(1.0546-0.00216T), T in °C
Effect @ 0% RH	±0.007% RH/°C (negligible)
Effect @ 100% RH	-0.22% RH/°C (<1% RH effect typical in occupied space systems above 15°C (59°F))
Humidity Range	
Operating	0 to 100% RH, non-condensing ⁽¹⁾
Storage	0 to 90% RH, non-condensing
Temperature Range	
Operating	-40° to 85°C (-40° to 185°F)
Storage	-51° to 125°C (-60° to 257°F)
Package ⁽²⁾	Three pin solderable ceramic SIP
Handling	Static sensitive diode protected to 15 kV maximum

- Notes:**
1. Extended exposure to ≥90% RH causes a reversible shift of 3% RH.
 2. This sensor is light sensitive. For best results, shield the sensor from bright light.

OUTPUT VOLTAGE VS RELATIVE HUMIDITY (at 0°C)

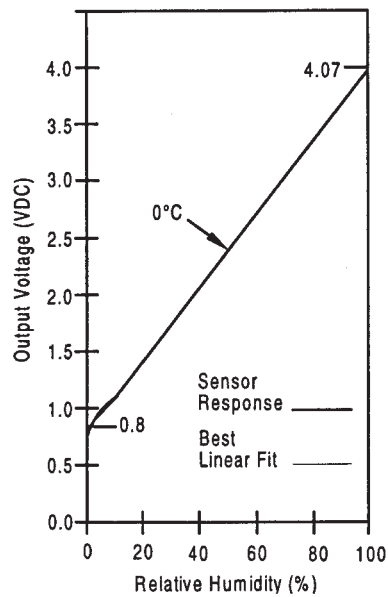

OUTPUT VOLTAGE VS RELATIVE HUMIDITY (at 0°C, 25°C, and 85°C)

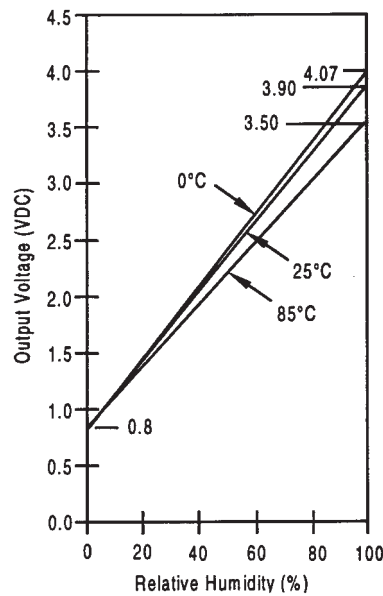

深圳市商斯达实业有限公司荣誉出品

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

中国传感器科技信息网：[HTTP://WWW.SENSOR-IC.COM/](http://www.sensor-ic.com/)

工控安防网：[HTTP://WWW.PC-PS.NET/](http://www.pc-ps.net/)

消费电子专用电路网：[HTTP://WWW.SUNSTARE.COM/](http://www.sunstare.com/)

E-MAIL：xjr5@163.com szss20@163.com

MSN：suns8888@hotmail.com

QQ: 195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83338339 邮编：518033 手机：(0)13902971329

**深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX：
0755-83665529 25059422**

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376