

MODEL NO: Device Number: DHI-092-003 REV: 1.0
HI400 ECN: Page: 2/6

■ **NOTES:**

1. This drawing measure is a standard value. All dimensions are in millimeter.
2. In case of designation is tolerance $\pm 0.3\text{mm}$.
3. Lead spacing is measured where the lead emerge from the package.
4. Protruded resin under flange 1.0 mm Max.
5. Lens color : Black.
6. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
7. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT consent.
8. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

■ **FEATURES:**

1. 4V to 20V operation.
2. No need for reverse voltage.
3. High reliability.
4. Small size.
5. Output compatible with all digital logic families.

■ **APPLICATIONS:**

1. Brushless DC motor.
2. Rotation detection.
3. Displacement detection.
4. Speed sensing.

Device Number: **DHI-092-003** REV: **1.0**
 MODEL NO: **HI400** ECN: Page: **3/6**

ABSOLUTE MAXIMUM RATINGS:**(Ta=25°C)**

PARAMETER	SYMBOL	RATING	UNIT	CONDITION
Supply Voltage	V _{CC}	20	V	-
Supply Current	I _{CC}	25	mA	-
Output Current- Continuous Peak(Start Up)	I _{OUT}	300 700	mA	-
Maximum Power Dissipation	P _D	500	mW	-
Operating Ambient Temperature	T _A	-20~+85	°C	-
Storage Temperature	T _{STG}	-55~+120	°C	-
Soldering Temperature	T _{SOL}	260	°C	1/16 inch from body for 5 seconds

ELECTICAL CHARACTERISTICS:**(Ta=25°C)**

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Supply Voltage	V _{CC}	4	-	20	V	Operating
Output Saturation Voltage	V _{CE(SAT)}	-	250	500	mV	V _{CC} =14V, I _{OUT} =400mA, B>B _{op}
Supply Current	I _{CC}	-	18	25	mA	V _{CC} =20V, Output Open
Output Leakage Current	I _{LEAK}	-	-	5	μA	V _{CE} =14V, V _{CC} =14V
Output Rise Time	t _r	-	3.0	10	μS	V _{CC} =14V, R _L =820Ω,
Output Fall Time	t _f	-	0.3	1.5	μS	C _L =20pF

MAGNETIC SPECIFICATION:**(Ta=25°C)**Condition: V_{CC}=20V

Unit : Gauss

Bin Number	Bin 1	Bin 2	Bin 3	Bin 4
Min	1	55	85	125
Max	70	100	140	200

Device Number: **DHI-092-003** REV: **1.0**
 MODEL NO: **HI400** ECN: Page: **4/6**

TYPICAL CHARACTERISTICS CURVES:

Fig. 1 Supply Current V.S. Supply Voltage

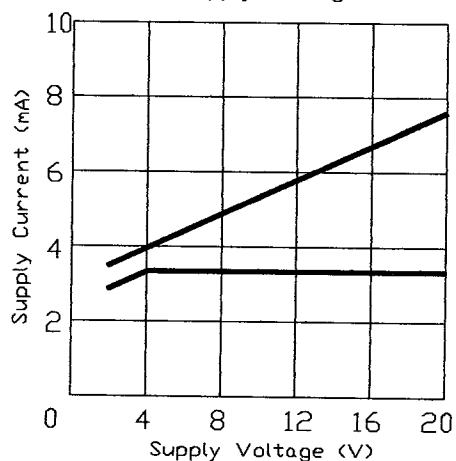


Fig. 2 Output Low Voltage V.S. Supply Voltage

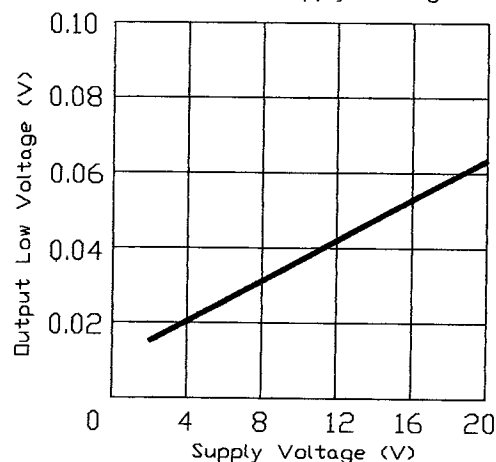


Fig. 3 Switch Points (Bop,Brp) V.S. Supply Voltage

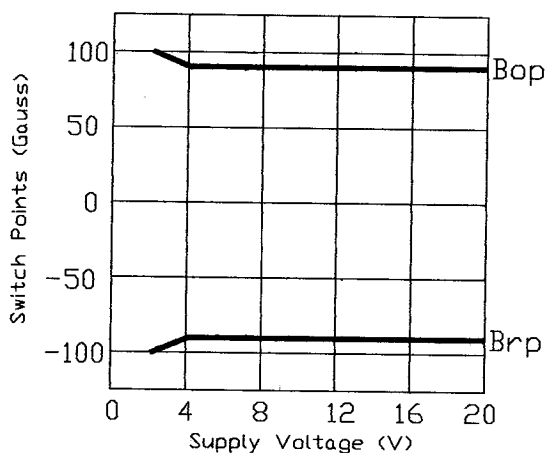


Fig. 4 Switch Points V.S. Ambient Temperature

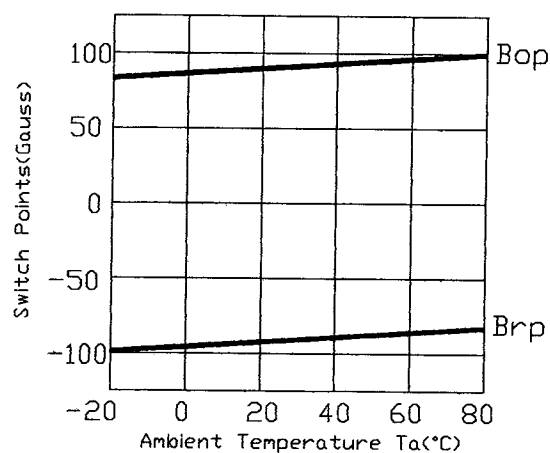


Fig. 5 Supply Current V.S. Ambient Temperature



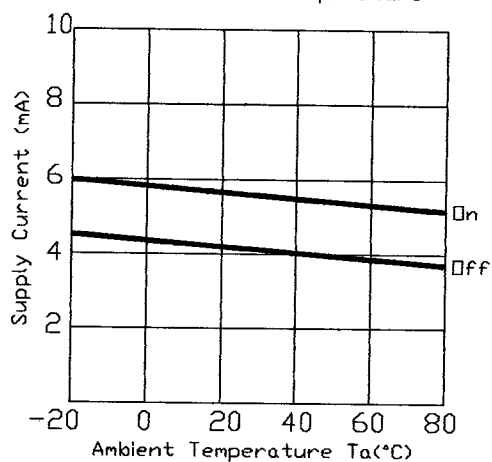


Fig. 6 Hysteresis Deviation V.S. Ambient Temperature

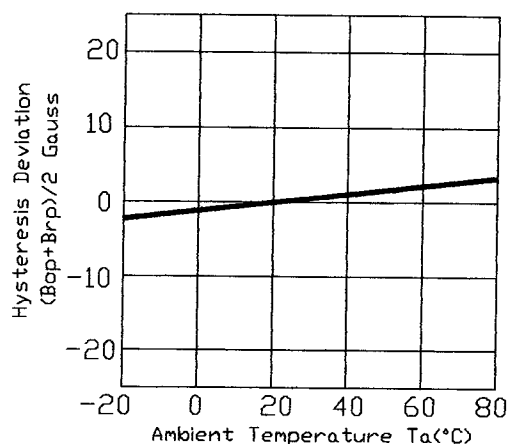

MODEL NO: _____ **Device Number:** DHI-092-003 **REV:** 1.0
HI400 **ECN:** _____ **Page:** 5/6

FUNCTION BLOCK DIAGRAM:

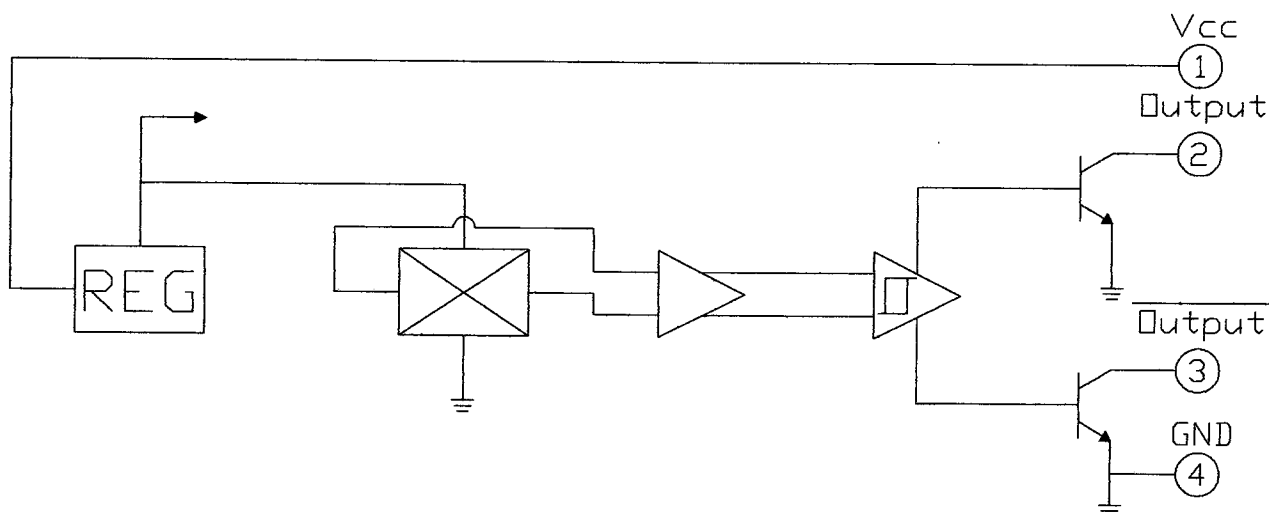

RELIABILITY:

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%


TEST ITEMS	TEST CONDITIONS	FAILURE JUDGEMENT CRITERIA	SAMPLES(n)
			DEFECTIVE(c)
Operation life	Vcc=12V, Ta=25°C 1000hrs	$ B_{op} < \pm 20\text{Gauss}$ $ B_{rp} < \pm 20\text{Gauss}$ $0.8 \cdot L < I_{cc} < 1.2 \cdot U^*$ $V_{SAT} < 1.5 \cdot U$ $I_{LEAK} < 1.5 \cdot U$ L : Lower Specification Limit U : Upper Specification Limit	n=22 , c=0
Temperature cycle	1 cycle -55°C to +85°C (30min) (30min) 50 cycle test		n=22 , c=0
Thermal shock	-10°C to +100°C (5min) (10sec) (5min) 50 cycle test		n=22 , c=0
High temperature storage	Temp : +150°C 1000hrs		n=22 , c=0
Low temperature storage	Temp : -55°C 1000hrs		n=22 , c=0
High temperature High humidity	TA : 85°C RH : 85% 1000hrs		n=22 , c=0
Solder heat	Temp : 260 ± 10°C sec 4mm Form the bottom of the package		n=22 , c=0

Device Number: DHI-092-003 REV: 1.0
MODEL NO: HI400 ECN: Page: 6/6


■ PACKING SPECIFICATIONS:

(UNIT : mm)


1.Bag:



3.Carton:

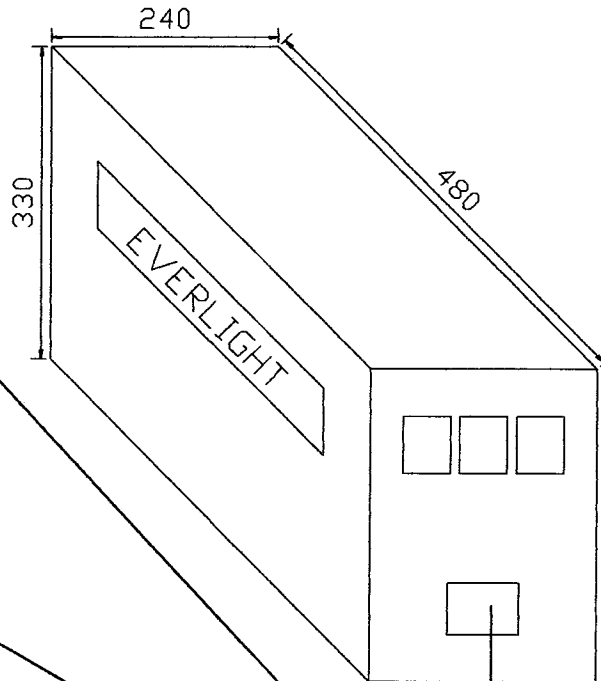

2.Box:



Packing Quantity Specification:

1.1000Pcs/1bag,10bags/1box

2.10boxes/1Carton

Label Specification:

CPN : Customer's Production Nimber

P/N : Production Number

QTY : Packing Quantity

CAT : Ranks

HUE : Reference

REF : Reference

LOT NO : Lot Number

MADE IN TAIWAN : Production place

Label

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

[中国传感器科技信息网：HTTP：//WWW.SENSOR-IC.COM/](http://WWW.SENSOR-IC.COM/)

[工控安防网：HTTP：//WWW.PC-PS.NET/](http://WWW.PC-PS.NET/)

[消费电子专用电路网：HTTP://WWW.SUNSTARE.COM/](http://WWW.SUNSTARE.COM/)

E-MAIL：xjr5@163.com szss20@163.com

MSN：suns8888@hotmail.com

QQ：195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83338339 邮编：518033 手机：(0)13902971329

深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX：
0755-83665529 25059422

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)
西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376