


## QSC-12B SERIES

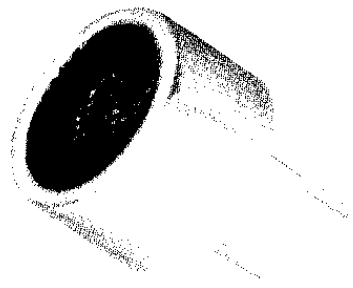

Model No	QSC-12B
Centre Frequency	40 ± 2KHz
Free Capacitance	2500 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	6g







图 12-1 QSC-12B 外形尺寸图

颜色 White  
材料 铝合金  
Pin 插脚

## QSC-16A SERIES

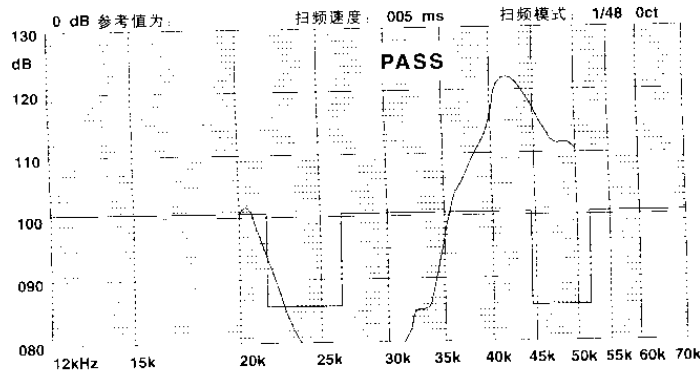

Model No	QSC-16A
Centre Frequency	25 ± 2KHz
Free Capacitance	3000 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	8g







图 16-1 QSC-16A 外形尺寸图

颜色 white  
材料 铝合金  
Pin 插脚

## QSC-16B SERIES

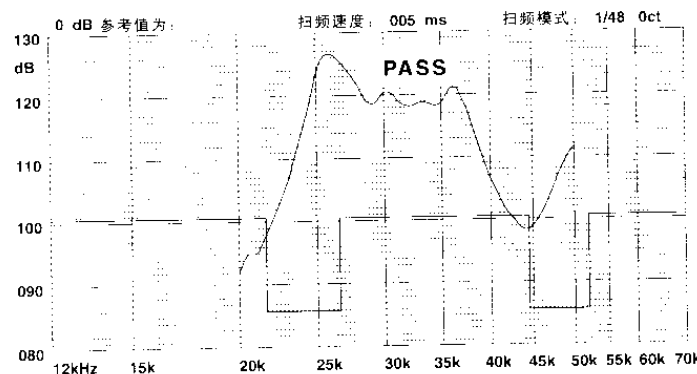

Model No	QSC-16B
Centre Frequency	40 ± 2KHz
Free Capacitance	3000 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	8g


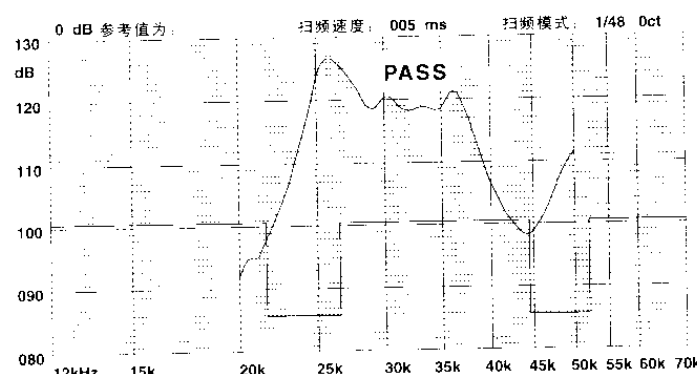



图 16-2 QSC-16B 外形尺寸图

颜色 White  
材料 铝合金  
Pin 插脚