






MINIATURE HIGH TEMPERATURE RUGGEDIZED IS® PRESSURE TRANSDUCER

XTME-190 (M) SERIES

- High Natural Frequency
- Robust Construction
- Excellent Stability
- Inorganically Bonded Sensor
- High Temperature Up to 450°F

The XTME-190 Series transducers are physically identical to the XTM-190 Series. High temperature material and assembly processes allow continuous use at maximum operating temperatures of +450°F (+232°C).

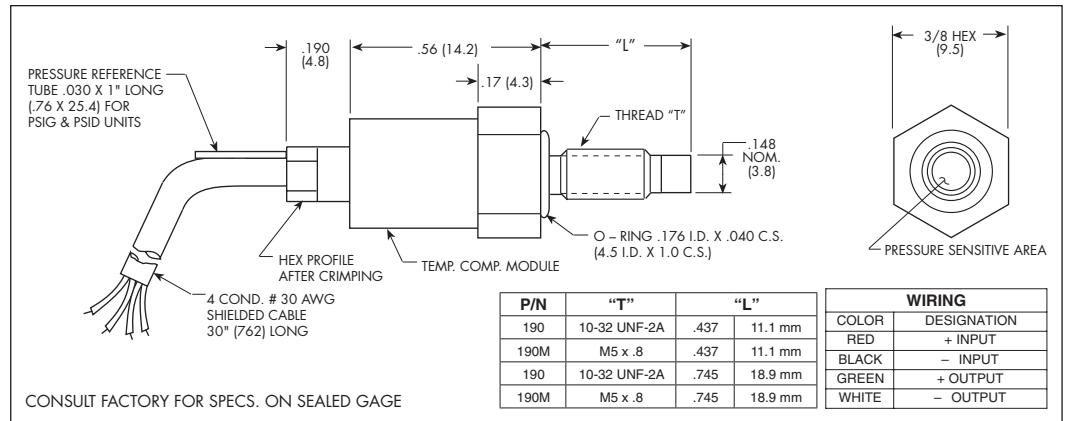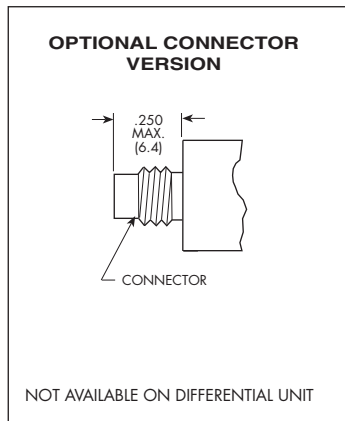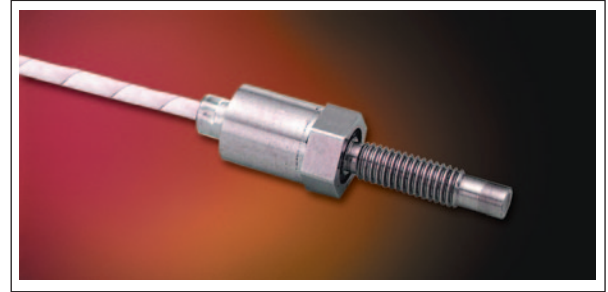

INPUT	1.7	3.5	7	17	35	70	170	350 BAR
Pressure Range	25	50	100	250	500	1000	2500	5000 PSI
Operational Mode	Absolute, Gage, Sealed Gage, Differential							
Over Pressure	3.5	7	14	35	70	140	210	420 BAR
	50	100	200	500	1000	2000	3000	6000 PSI
Burst Pressure	3 Times Rated Pressure to a Maximum of 6500 PSI (450 BAR)							
Pressure Media	Any Liquid or Gas Compatible With 17-4 PH or 316 Stainless Steel							
Rated Electrical Excitation	10 VDC							
Maximum Electrical Excitation	15 VDC							
Input Impedance	650 Ohms (Min.)							
OUTPUT								
Output Impedance	1000 Ohms (Nom.)							
Full Scale Output (FSO)	75 mV (Nom.)							
Residual Unbalance	± 5 mV (Typ.)							
Combined Non-Linearity, Hysteresis and Repeatability	±1% FSO BFSL (Typ.)							
Resolution	Infinitesimal							
Natural Frequency (KHz) (Typ.)	120	210	285	425	550	720	910	1120
Acceleration Sensitivity % FS/g								
Perpendicular	1.9x10 ⁻³	1.0x10 ⁻³	5.2x10 ⁻⁴	2.2x10 ⁻⁴	1.1x10 ⁻⁴	6.2x10 ⁻⁵	2.6x10 ⁻⁵	1.5x10 ⁻⁵
Transverse	5.0x10 ⁻⁵	3.1x10 ⁻⁵	2.0x10 ⁻⁵	1.0x10 ⁻⁵	7.0x10 ⁻⁶	4.3x10 ⁻⁶	2.3x10 ⁻⁶	1.5x10 ⁻⁶
Insulation Resistance	100 Megohm Min. @ 50 VDC							
ENVIRONMENTAL								
Operating Temperature Range	-65°F to +450°F (-55°C to +235°C)							
Compensated Temperature Range	+80°F to 450°F (25°C to +235°C)							
Thermal Zero Shift	Within 10% Over Compensated Temperature Range (Typ.)							
Thermal Sensitivity Shift	Within 7% Over Compensated Temperature Range (Typ.)							
Linear Vibration	100g Peak, Sine Up to 5000 Hz							
Humidity	100% Relative Humidity							
PHYSICAL								
Electrical Connection	4 Conductor 30 AWG Shielded Cable 30" Long							
Weight	8 Grams (Nom.) Excluding Cable							
Pressure Sensing Principle	Inorganically Bonded Piezoresistive Sensor							
Mounting Torque	15 Inch-Pounds (Max.)							

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters.