



DigiPicco™ Basic I²C Capacitive Humidity Module

With calibrated and linearized I²C output signal




INNOVATIVE SENSOR TECHNOLOGY

Benefits & Characteristics

- Precise humidity and temperature measurement
- Fully calibrated
- Very low drift due to wide sensor area
- Excellent response time
- Integrated Pt1000 temperature sensor and P14 humidity sensor
- Module with external sensor available
- Calibrated humidity and temperature signals on one bus
- PCB moisture protected
- Customer specific module available upon request

Illustration¹⁾

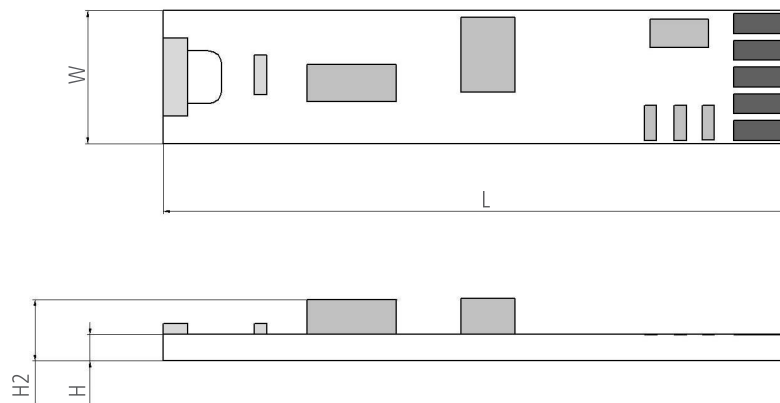

1) For actual size, see dimensions

Technical Data

Dimensions (L x W x H / H2 in mm):	47 x 10 x 1 / 2.8
Operating humidity range:	0 % RH to 100 % RH (maximal dew point = +85 °C)
Operating temperature range:	-25 °C to +85 °C with external sensor elements, other ranges on request (P14: -50 °C to +150 °C or MK33: -40 °C to +190 °C)
Humidity sensor:*	P14 SMD
Temperature sensor:*	Pt1000, class B (DIN EN 60751 F0.3)
Humidity accuracy:	< ±3 % RH (15 % RH to 85 % RH at +23 °C) < ±5 % RH (0 % RH to 15 % RH and > 85 % RH at +23 °C)
Temperature accuracy:	±0.5 K (-25 °C to +85 °C)
Response time t_{63} :	< 5 s (50 % RH to 0 % RH) at +23 °C
Operating voltage (V_{CC}):	5 V_{DC}
Current consumption:	< 3 mA
Output signal:	0x0 to 0x7FFF (0 % RH to 100 % RH) 0x0 to 0x7FFF (-40 °C to +125 °C)
I ² C standard address:*	0x78



HUMIDITY



TEMPERATURE



FLOW



CONDUCTIVITY

DigiPicco™ Basic I²C Capacitive Humidity Module



INNOVATIVE SENSOR TECHNOLOGY


With calibrated and linearized I²C output signal

Connection:*	Soldering pads for V _{CC} , clock and data (I ² C), GND
Storage conditions:	-40 °C to +80 °C at max. 95 % RH non condensing
Cable (external sensor version only):	PTFE, 1 m (other lengths on request)

* Customer specific alternatives available

Pin Assignment

W1	W2	W3	W4	W5	W6	W7	W8	W9	W10
		Clock SCL (I ² C)	Data SDA (I ² C)				GND		V _{CC} +



Order Information - Module

Order code	DigiPicco (TM) Basic I2C-G 150.00015
------------	---

Order Information - Module with PTFE cable, 1 m

Order code	DigiPicco (TM) Basic I2C-G.5 150.00092
------------	---



INNOVATIVE SENSOR TECHNOLOGY

Innovative Sensor Technology IST AG, Stegrütistrasse 14, CH-9642 Ebnat-Kappel, Switzerland,
Phone: +41 (0) 71 992 01 00 | Fax: +41 (0) 71 992 01 99 | E-mail: info@ist-ag.com | Web: www.ist-ag.com



All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved