


Model T5 General Purpose-Pedestal Rotary Torque Transducer

Why the Interface model T5 General Purpose-Pedestal Rotary Torque Transducer is the best in class:

- Integral mounting base
- **±5 VDC output**
- **Digital electronics**
- **Stainless steel shaft**
- **12 to 28 VDC supply**
- **Contactless**
- **10 kHz sample rate**
- **Capacities from 0.1 to 1K Nm (0.85 to 8.85K lb-in)**

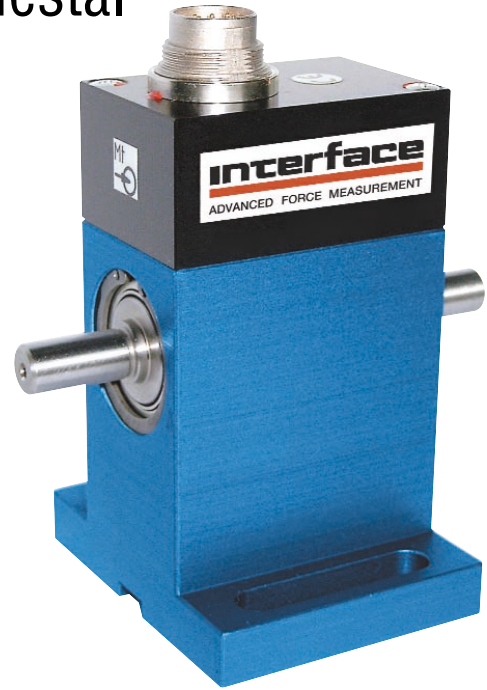

T5 General Purpose-Pedestal Rotary Torque Transducer

OPTIONS

Speed & Angle Measurement - 360 Pulse TTL, 2-Tracks 90° Offset, Available on capacities up to 1,000 Nm only
 Speed Output - 60 Pulse TTL, 1-Track, Available on capacities 2,000 Nm & above
 ±10 V torque output
 RS485
 High RPM
 Keyed Shafts
 SAE Sized Shafts

SPECIFICATIONS

ACCURACY – (MAX ERROR)

Combined Error-% FS±0.2
 Nonrepeatability-%±0.04

TEMPERATURE

Effect on Zero-% RO/°C±0.03
 Effect on Output-%/°C±0.015
 Rated Range-°C+5 to +45
 Operating Range-°C0 to +60

ELECTRICAL

Output-VDC±5
 Bandwidth, Hz3 kHz-3dB
 Calibration Signal-% RO100
 Supply Voltage-VDC.....12 to 28
 Supply Current-mA60
 Electrical Connection12-pin

MECHANICAL

Safe Overload-% RO200
 Cyclic Load Rating-% RO.....±70 peak
 Max Speed - rpmVaries with capacity, see table


Shaft.....Stainless steel
 HousingAluminum

Model T5 General Purpose-Pedestal Rotary Torque Transducer -

Capacities 0.1 to 1 Nm

DIMENSIONS


| Nominal Torque | | | | |
|--------------------|-------------------|-----|-------------------|-----|
| Capacity (Nm) | 0.1, 0.2 | | 0.5, 1 | |
| Equivalent (lb-in) | 0.85, 1.77 | | 4.43, 8.85 | |
| | inch | mm | inch | mm |
| ① | 3.35 | 85 | 3.35 | 85 |
| ② | 0.71 | 18 | 3.86 | 98 |
| ③ | 0.3148/ 0.3144 | 8g6 | 0.3148/ 0.3144 | 8g6 |
| ④ | 0.67 | 17 | 0.67 | 17 |

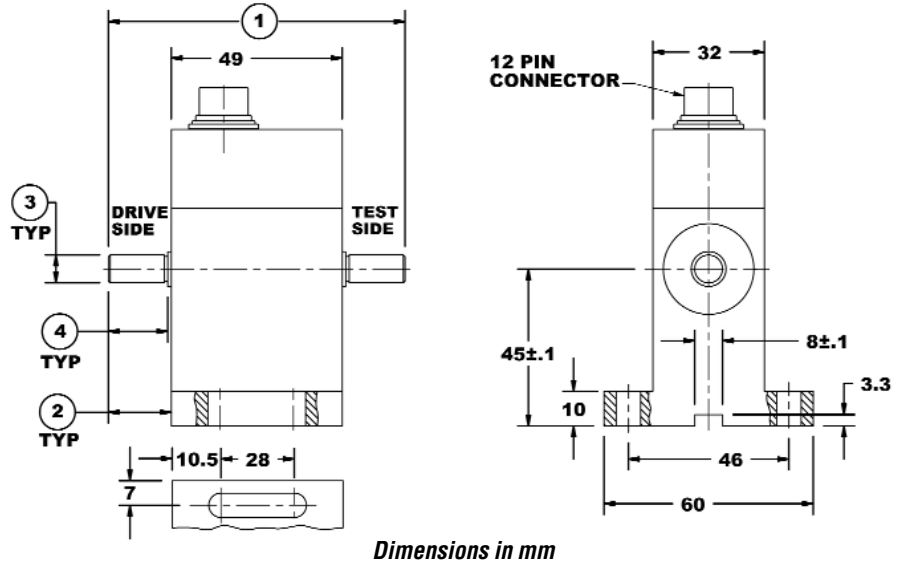

Model T5 General Purpose-Pedestal Rotary Torque Transducer - Capacities 2 to 100 Nm

DIMENSIONS


| Nominal Torque | | | | | | | | |
|--------------------|-------------------|-------|-------------------|-------|-------------------|-------|-------------------|-------|
| Capacity (Nm) | 2, 5 | | 10, 15 | | 20, 30 | | 50, 100 | |
| Equivalent (lb-in) | 17.7, 44.3 | | 88.5, 133 | | 177, 265 | | 443, 885 | |
| | inch | mm | inch | mm | inch | mm | inch | mm |
| ① | 4.23 | 107.5 | 4.23 | 107.5 | 4.39 | 111.5 | 5.81 | 147.5 |
| ② | 0.71 | 18 | 0.71 | 18 | 0.79 | 20 | 1.50 | 38 |
| ③ | 0.3148/ 0.3144 | 8g6 | 0.3935/ 0.3931 | 10g6 | 0.7087/ 0.7082 | 18 h6 | 0.7087/ 0.7082 | 18 h6 |
| ④ | 0.67 | 17 | 0.67 | 17 | 0.71 | 18 | 1.42 | 36 |

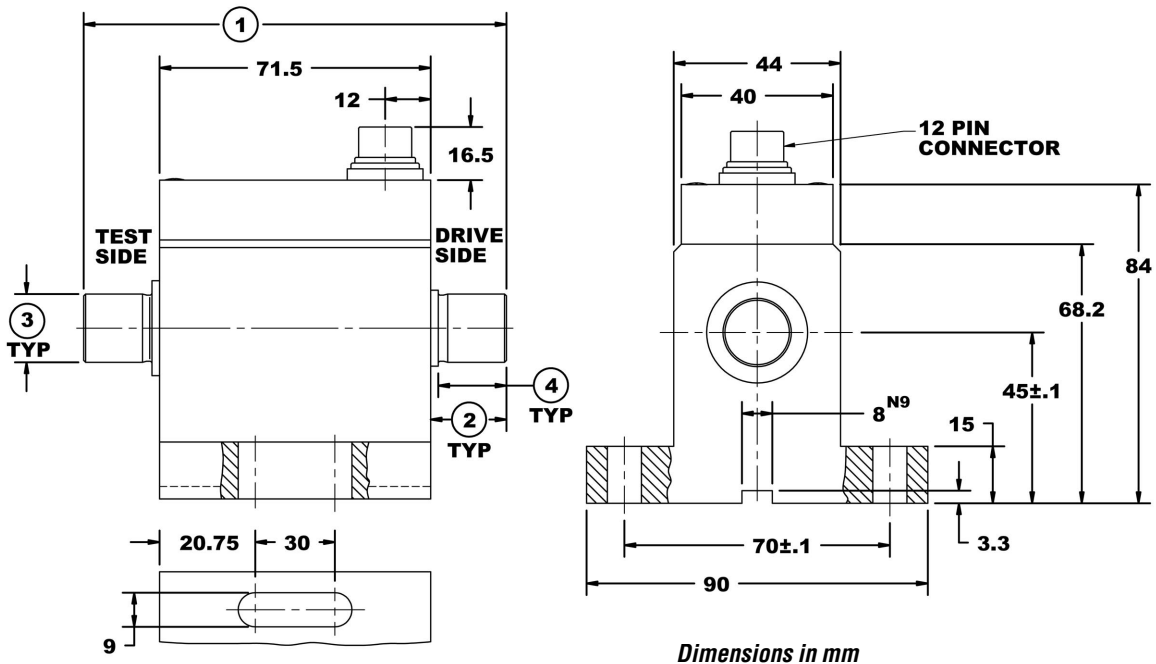



Model T5 General Purpose-Pedestal Rotary Torque Transducer -
Capacities 200 to 1,000 Nm

DIMENSIONS

| Nominal Torque | | | | |
|--------------------|-------------------|-------|-------------------|-------|
| Capacity (Nm) | 200, 500 | | 1K | |
| Equivalent (lb-in) | 1.77K, 4.43K | | 8.85K | |
| | inch | mm | inch | mm |
| ① | 3.50 | 89 | 3.50 | 89 |
| ② | 8.54 | 217 | 10.31 | 262 |
| ③ | 1.71 | 43.5 | 2.60 | 66 |
| ④ | 1.2595/ 1.2598 | 32 h6 | 1.9685/ 1.9675 | 50 h7 |
| ⑤ | 1.50 | 38 | 2.28 | 58 |
| ⑥ | 5.12 | 130 | 5.12 | 130 |
| ⑦ | 4.53 | 115 | 4.63 | 115 |
| ⑧ | 7.50 | 190.4 | 7.50 | 190.4 |
| ⑨ | 4.41 | 112 | 4.41 | 112 |
| ⑩ | 0.79 | 20 | 0.79 | 20 |
| ⑪ | 6.89 | 175 | 6.89 | 175 |
| ⑫ | 1.18 | 30 | 1.18 | 30 |
| ⑬ | 5.71 | 145 | 5.71 | 145 |

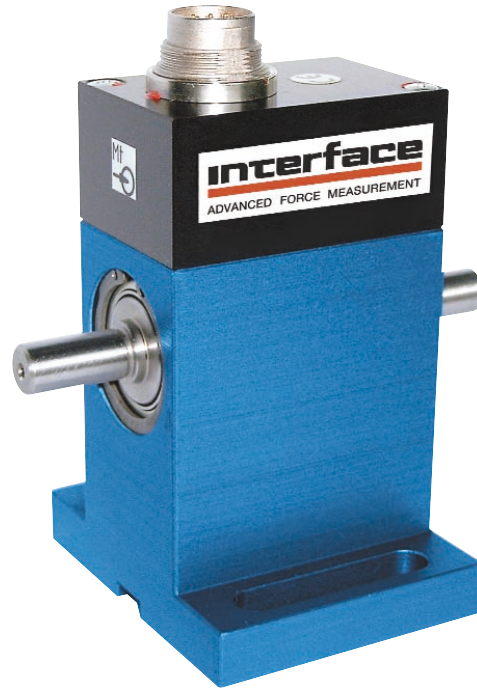

**T5 General Purpose-Pedestal
Rotary Torque Transducer**

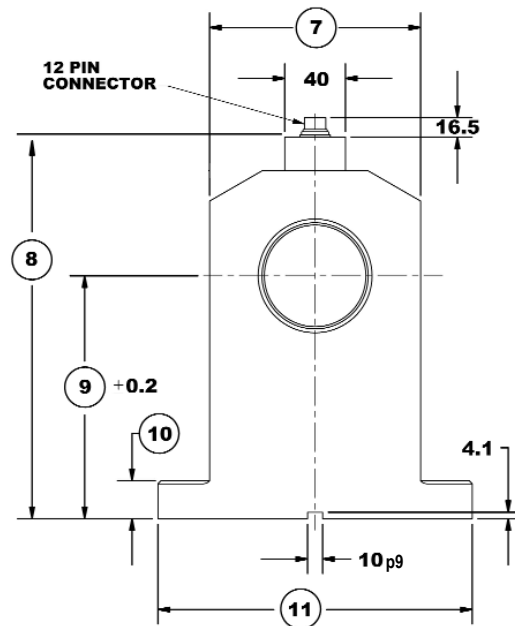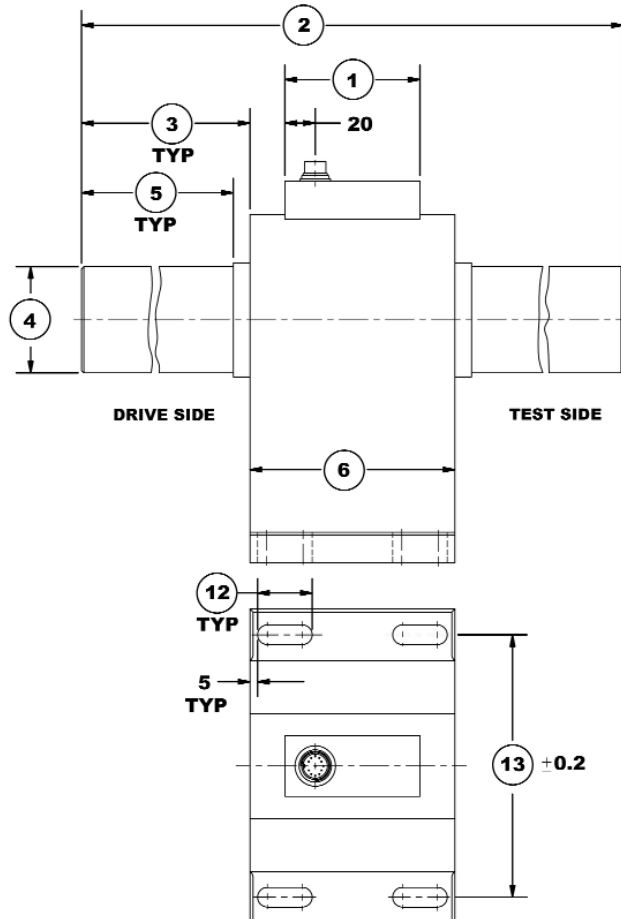

Dimensions in mm

T5 GENERAL PURPOSE-PEDESTAL ROTARY TORQUE TRANSDUCER PERFORMANCE PARAMETERS

| CAPACITY (Nm) | MAX RPM | | SPRINGRATE (Nm/rad) | MOMENT OF INERTIA, J (Kgxm ²) | | MAX THRUST LOAD (N) |
|------------------|----------|---------|------------------------|---|----------------------|------------------------|
| | Standard | Special | | Drive Side | Test Side | |
| 0.1 | 10,000 | 15,000 | 1.0 | 2.0x10 ⁻⁶ | 2.8x10 ⁻⁷ | 15 |
| 0.2 | 10,000 | 15,000 | 1.0 | 2.0x10 ⁻⁶ | 2.8x10 ⁻⁷ | 15 |
| 0.5 | 10,000 | 15,000 | 9.9 | 2.0x10 ⁻⁶ | 2.8x10 ⁻⁷ | 30 |
| 1 | 10,000 | 15,000 | 9.9 | 2.0x10 ⁻⁶ | 2.8x10 ⁻⁷ | 40 |
| 2 | 8,000 | 12,000 | 4.4x10 ² | 1.0x10 ⁻⁵ | 8.1x10 ⁻⁶ | 50 |
| 5 | 8,000 | 12,000 | 4.4x10 ² | 1.0x10 ⁻⁵ | 8.1x10 ⁻⁶ | 50 |
| 10 | 8,000 | 12,000 | 1.4x10 ³ | 1.0x10 ⁻⁵ | 8.2x10 ⁻⁶ | 50 |
| 15 | 8,000 | 12,000 | 1.4x10 ³ | 1.0x10 ⁻⁵ | 8.2x10 ⁻⁶ | 100 |
| 20 | 8,000 | 12,000 | 4.5x10 ³ | 1.2x10 ⁻⁵ | 9.9x10 ⁻⁶ | 300 |
| 30 | 8,000 | 12,000 | 4.8x10 ³ | 1.3x10 ⁻⁵ | 9.9x10 ⁻⁶ | 1,000 |
| 50 | 6,000 | 12,000 | 6.1x10 ³ | 1.3x10 ⁻⁵ | 1.1x10 ⁻⁵ | 1,600 |
| 100 | 6,000 | 12,000 | 9.7x10 ³ | 1.4x10 ⁻⁵ | 1.2x10 ⁻⁵ | 2,600 |
| 200 | 4,000 | 7,000 | 9.2x10 ⁴ | 1.3x10 ⁻³ | 8.0x10 ⁻⁴ | 3,200 |
| 500 | 4,000 | 7,000 | 9.2x10 ⁴ | 1.3x10 ⁻³ | 8.0x10 ⁻⁴ | 7,500 |
| 1,000 | 4,000 | 7,000 | 2.8x10 ⁵ | 1.7x10 ⁻³ | 1.2x10 ⁻³ | 10,000 |

ELECTRICAL CONNECTION

| Pin | 12-PIN T5 | | 12-PIN T5 RS485 OPTION | |
|-----|----------------|---------------------|------------------------|-------------|
| | Function | Description | Function | Description |
| A | NC | - | NC | - |
| B | Option Angle B | TTL | Option Angle B | TTL |
| C | Signal (+) | ±5 VDC | NC | - |
| D | Signal (GND) | 0 VDC | NC | - |
| E | Supply (GND) | 0 VDC | Supply (GND) | 0 VDC |
| F | Supply (+) | 12-28 VDC | Supply (+) | 12-28 VDC |
| G | Option Angle A | TTL | Option Angle A | TTL |
| H | NC | - | NC | - |
| J | NC | - | RS485 Option | RS485 (B) |
| K | Cal. Control | L < 2.0 / H > 3.5 V | NC | - |
| L | NC | - | RS485 Option | RS485 (A) |
| M | Housing | | Housing | |