



8852 系列压力变送器

- 用于潜在爆炸危险的工业环境
- 符合 EE 99 ATEX 2642
- EMC 保护 IEC61000
- 优良的抗过压性能
- 密封及与介质接触部分材料为 AISI316L



技术参数

介 质：气体、液体
工作温度：参阅右边数据
防护等级：IP65
供电电压：10—30VDC
精 度：±0.5% FS
压力连接：G1/4 外螺纹
电气连接：DIN43650A
输出信号：4—20mA
温度组别：参阅右边数据


温度组别	环境温度	介质温度
EEx ia IIC T3	-25—85° C	-25—150° C
EEx ia IIC T4	-25—85° C	-25—100° C
EEx ia IIC T6	-25—55° C	-25—55° C

订货标准型（相对压力）


压力范围 bar	过压 bar	破坏压力 bar	产品代码
0—0.2	3	200	8852 68
0—0.4	3	200	8852 69
0—0.6	3	200	8852 70
0—1.0	3	200	8852 71
0—2.5	7.5	200	8852 75
0—4.0	12	200	8852 76
0—6.0	18	200	8852 77
0—10.0	30	200	8852 78
0—16.0	48	200	8852 79
0—25.0	75	200	8852 80
0—40.0	120	850	8852 81
0—100.0	300	850	8852 83
0—250.0	750	850	8852 74

如需监测更高或更低压力请与我们联系


MASSBILDER & EL. ANSCHLUSS / COTES D'ENCOMBREMENT & RACCORDEM. ÉLECTR. / DIMENSIONS & EL. CONNECTION




885X.XX.XX.10.XX.XX.XX...




885X.XX.XX.15.XX.XX.XX...




885X.XX.XX.20.XX.XX.XX...




885X.XX.XX.21.XX.XX.XX...




885X.XX.XX.31.XX.XX.XX...




885X.XX.XX.32.XX.XX.XX...




885X.XX.XX.11.XX.XX.XX...

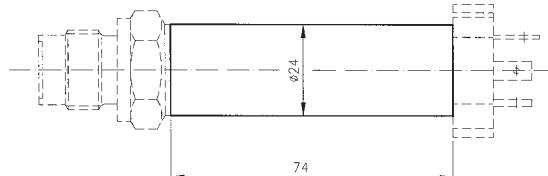


885X.XX.XX.XX.XX.XX.T4...
885X.XX.XX.XX.XX.XX.T6...

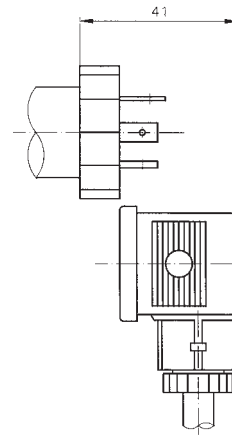

Pin 4...20mA
1 +Vin
2 Pout
3 ⏏




885X.XX.XX.XX.04.XX.58...

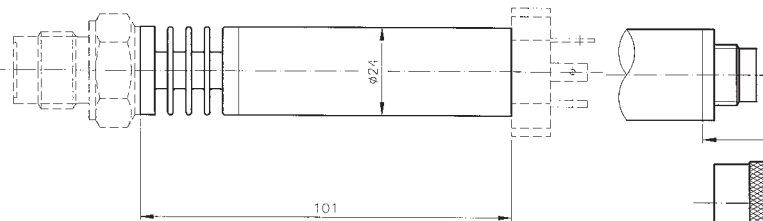


885X.XX.XX.XX.XX.XX.T3...

Pin 4...20mA
1 Pout
3 +Vin
5 ⏏



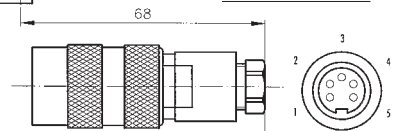


885X.XX.XX.XX.14.XX.37...




Farbe/ Couleur/ Color 4...20mA
weiss/ blanc/ white +Vin
gelb/ jaune/ yellow Pout
braun/ brun/ brown ⏏

885X.XX.XX.XX.22.XX.XX...

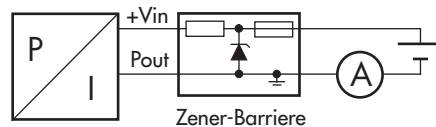

Pin 4...20mA
A +Vin
C Pout
F ⏏



885X.XX.XX.XX.02.XX.32...

Trafag AG, Emil-Staub-Strasse 1, CH-8708 Männedorf, Tel +41 44 922 32 32, Fax +41 44 922 32 33, www.trafag.com

ÄNDERUNGEN VORBEHALTEN - SOUS RÉSERVE DE MODIFICATIONS - SUBJECT TO CHANGE