

ISN 温度开关

- 用于温度调节和报警
- 低回差、高可靠性
- 具备 GL、ABS、BV、DNV 等船级认证
- 广泛适用于造船、发动机、铁路等领域

主要技术参数

环境温度: -30℃~70℃

防护等级: IP65

电路连接: 接线柱螺丝

触点负载: AC 500V 10(0.75)A

DC 30V 15(1.5)A

DC 25V 0.3(0.2) A




产品图片 H72111

定货-标准型


设定范围 (℃)	回差 (℃)	最高介质温度 (℃)	感应包长度 (mm)	毛细管长度 (m)	产品代码
20~110	2	115	110	3	ISN11011
20~110	2	115	150	3	ISN11015
20~110	2	115	65	3	ISN11065
20~150	2.5	165	110	3	ISN15011
20~150	2.5	165	150	3	ISN15015
20~150	2.5	165	65	3	ISN15065

注: 毛细管和感应包长度可按客户要求订制



MASSBILDER / COTES D'ENCOMBREMENT / DIMENSIONS

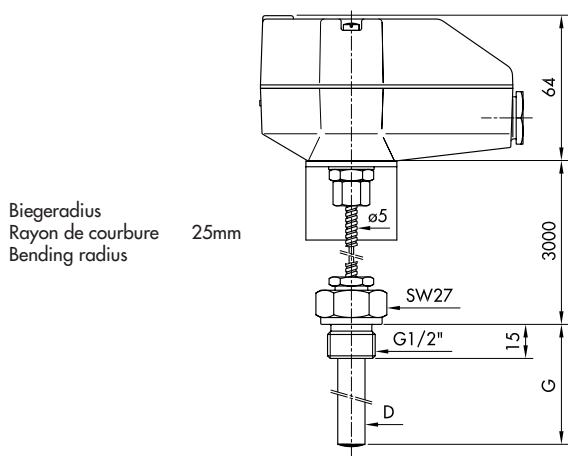


47X.XXXX.XXX.27.831X

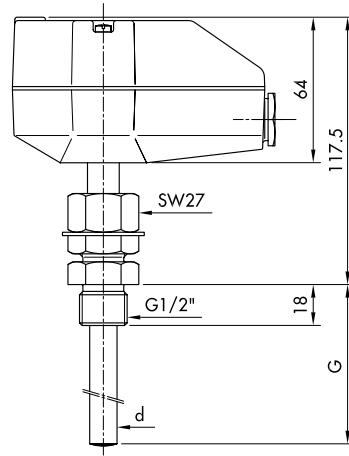

47X.XXXX.XXX.14.141X

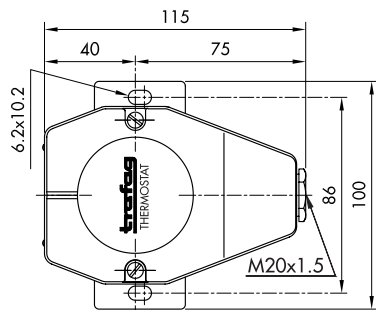


**ZUBEHÖR / ACCESSOIRES/
ACCESSORIES**

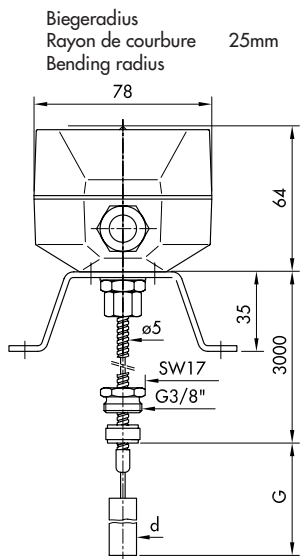


Ausführung
Exécution B
Execution

Ohne Schutzrohr
Sans doigt de gant
Without protection tube

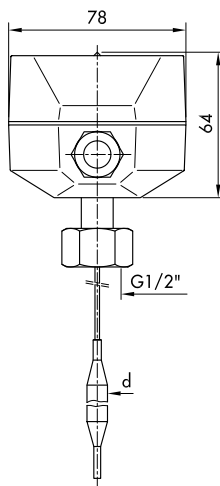

Ausführung
Exécution K
Execution

Ohne Schutzrohr
Sans doigt de gant
Without protection tube



XXX.XXXX.XXX.XX.XXXX.XXXX.40

M18x1.5



XXX.XXXX.XXX.XX.XXXX.XXXX.27

M24x1.5

