

9X0 系列模块式压力开关

- 结构坚实、紧凑，节约安装成本
- 高重复性
- 固定回差低
- 优良的抗过压性
- 螺纹连接或是集装
- 可提供 ABS, BV, DNV, GL, KRS, LARS, RINA 等船级认证



技术参数

介质 : 液体和气体

介质温度 : 波纹管型 -25°C — 120°C , 薄膜型: 0°C — 80°C , 活塞型: -25°C — 120°C

环境温度 : 波纹管型 -25°C — 85°C , 薄膜型: 0°C — 80°C , 活塞型: -25°C — 85°C

防护等级 : IP65

电器连接 : DIN43650


触点系统 : SPDT 微动开关

触点负载 : AC 250V 6 (1) A
 DC 24V 3 (2) A
 DC 220V 0.25 (0.1) A


订货—标准型

设置范围 bar	回差 bar	允许工作压力 力 bar	类型	代码	
				G1/4	G1/4 + Flange
-0.6—3.4	0.3	12	Bellows	PST3.44	PST3.4F4
0—6	0.3	12	Bellows	PST64	PST6F4
1—16	0.7	24	Bellows	PST164	PST16F4
1—16	0.4—1.7	200	Membrane	PSTM164	PSTM16F4
4—40	1.6	40	Bellows	PST404	PST40F4
4—40	1.2—4.5	200	Membrane	PSTM404	PSTM40F4
10—100	4—16	200	Membrane	PSTM1004	PSTM100F4
10—100	5—15	200	Piston	PSTK1004	PSTK100F4
25—250	12—40	400	Piston	PSTK2504	PSTK250F4
40—400	15—50	600	Piston	PSTK4004	PSTK400F4

MASSBILDER / COTES D'ENCOMBREMENT / DIMENSIONS

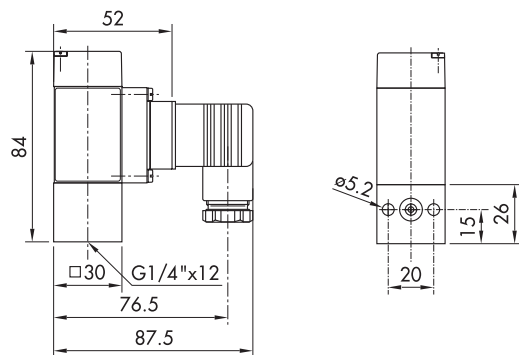


9X0.XXXX.7XX.04.58.V3

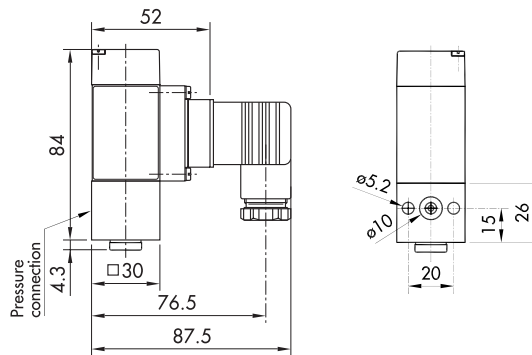

9X0.XXXX.7XX.0X.11.58.74.V3


ZUBEHÖR / ACCESSOIRES / ACCESSORIES



- 1) Anziehdrehmoment: G 1/8": $M_A = 16 \dots 20 \text{ Nm}$
couple de serrage: G 1/4": $M_A = 32 \dots 40 \text{ Nm}$
torque moment:

- 2) O-Ring: $\varnothing 6.75 \times 1.78$
 $\geq 250 \text{ bar}$ Nitril 90°Shore
 $< 250 \text{ bar}$ Nitril 70°Shore

XXX.XXXX.XXX.XX.11



M5x40 ISO4762

- 3) Befestigungs-Schraube:
vis de fixation: M5
fixing screw:
Festigkeitsklasse:
classe de résistance: 8.8
property class:
Anziehdrehmoment:
couple de serrage: 4.5 ... 6 Nm
mounting torque:

XXX.XXXX.XXX.XX.V3

Diagnostik Ventil Block (DVB)
Bloc Valves Diagnostic (DVB)
Diagnostic Valve Bloc (DVB)

siehe Datenblatt: H72242
voir spécification:
see specification sheet:

