

## Interactive Catalog Supplements Catalog PDFs

If you need detailed product information, or help choosing the right product for your application, see our **Interactive Catalog**. Use the **Interactive Catalog** to access the most complete and up-to-date information available.

The **Interactive Catalog** provides an extensive collection of product specifications, application data, and technical literature that can be searched based on criteria you select.

This PDF catalog information was published in November 2000.



Sensing and Control  
**Interactive  
Catalog...**

**Click this icon to try  
the Interactive Catalog.**

**Sensing and Control**

Honeywell Inc.












11 West Spring Street

Freeport, IL 61032



**AML51 PUSHBUTTON ORDER GUIDE** (All possible color combinations may not be available.)

For Incandescent or non-lighted display switches and pushbutton style indicators.

<b>AML51-C</b>	<b>10</b>	<b>R</b>	<b>—</b>
<b>For AML11, 21, 31 switches and AML41 indicators: Pushbutton Style</b>	<b>Display Legend/Type</b>	<b>Full Color or 1st Color Split</b>	<b>2nd Color Split</b>
 <b>AML51-C</b>  <b>AML51-F</b>  <b>AML51-G</b>  <b>AML51-A</b>  <b>AML51-H</b>  <b>AML51-N†</b>  <b>AML51-B*</b>  <b>AML51-E*</b>  <b>AML51-M*</b>  <b>AML51-R*</b>	<p><b>Transmitted Color</b>  <b>10</b> No legend  <b>20</b> With legend on cap.</p> <p><b>Transmitted Color</b>                      (Clear cap and color insert)  <b>11</b> No legend  <b>21</b> With legend on insert</p> <p><b>Dead Front</b>                      (Smoky gray cap and color insert)  <b>30</b> No legend  <b>40</b> With legend on insert</p> <p>****<b>Projected Color</b>                      (White cap and color insert)  <b>50</b> No legend  <b>60</b> With legend on cap</p>	<p><b>R</b> Red</p> <p><b>Y</b> Yellow</p> <p><b>G</b> Green</p> <p><b>B</b> Blue</p> <p><b>W****</b> White</p> <p><b>K***</b> Black</p> <p><b>L***</b> Gray</p> <p><b>A**</b> Amber</p>	<p><b>R</b> Red</p> <p><b>Y</b> Yellow</p> <p><b>G</b> Green</p> <p><b>B</b> Blue</p> <p><b>W****</b> White</p> <p><b>K***</b> Black</p> <p><b>L***</b> Gray</p> <p><b>A**</b> Amber</p>
<b>For AML41D indicators only:</b>			
 <b>AML51-D</b>			




Example: **AML51-C10R**  
 Square full color button; with transmitted color, no legend; red.

\*\* Available with transmitted color and dead front only.  
 \*\*\* Black and gray not recommended for lighted display.  
 † AML51-N buttons not available with Display/Legend Types 10 and 20.  
 Note: Dimensions include the .060 in bezel.

\* Available with transmitted color (10 or 20) only.  
 \*\*\*\* Insert is clear for projected color when "W" is used.

**AML51 LENS ORDER GUIDE** (All possible color combinations may not be available.)

For incandescent display AML41J, K, and L lens style indicators only.

<b>AML51-J</b>	<b>10</b>	<b>R</b>														
<b>Lens style</b>	<b>Display/Legend Type</b>	<b>Full Color or 1st Color Split</b>														
 <b>AML51-J</b>  <b>AML51-K</b>  <b>AML51-L</b>	<p><b>Transmitted Color</b>  <b>10</b> No legend  <b>20</b> With legend</p> <p><b>Transmitted Color</b>                      (Clear cap and color insert)  <b>11</b> No legend  <b>21</b> With legend</p> <p><b>Dead Front</b>                      (Smoky gray cap and color insert)  <b>30</b> No legend  <b>40</b> With legend</p> <p>****<b>Projected Color</b>                      (White cap and color insert)  <b>50</b> No legend  <b>60</b> With legend</p>	<table border="1"> <thead> <tr> <th style="text-align: center;"><b>2nd Color Split</b></th> <th style="text-align: center;"><b>3rd Color Split</b></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;"><b>R</b> Red</td> <td style="text-align: center;"><b>R</b> Red</td> </tr> <tr> <td style="text-align: center;"><b>Y</b> Yellow</td> <td style="text-align: center;"><b>Y</b> Yellow</td> </tr> <tr> <td style="text-align: center;"><b>G</b> Green</td> <td style="text-align: center;"><b>G</b> Green</td> </tr> <tr> <td style="text-align: center;"><b>B</b> Blue</td> <td style="text-align: center;"><b>B</b> Blue</td> </tr> <tr> <td style="text-align: center;"><b>W****</b> White</td> <td style="text-align: center;"><b>W****</b> White</td> </tr> <tr> <td style="text-align: center;"><b>A**</b> Amber</td> <td style="text-align: center;"><b>A**</b> Amber</td> </tr> </tbody> </table>	<b>2nd Color Split</b>	<b>3rd Color Split</b>	<b>R</b> Red	<b>R</b> Red	<b>Y</b> Yellow	<b>Y</b> Yellow	<b>G</b> Green	<b>G</b> Green	<b>B</b> Blue	<b>B</b> Blue	<b>W****</b> White	<b>W****</b> White	<b>A**</b> Amber	<b>A**</b> Amber
<b>2nd Color Split</b>	<b>3rd Color Split</b>															
<b>R</b> Red	<b>R</b> Red															
<b>Y</b> Yellow	<b>Y</b> Yellow															
<b>G</b> Green	<b>G</b> Green															
<b>B</b> Blue	<b>B</b> Blue															
<b>W****</b> White	<b>W****</b> White															
<b>A**</b> Amber	<b>A**</b> Amber															

**AML51 lens buttons** provide added display area by snapping onto and covering the bezel of AML41J, K, and L indicators. They do not fit other indicators or switches.

Example: **AML51-J10R**  
 Rectangular lens type button; full color; transmitted color, no legend; red.

**HOW TO ORDER BUTTON LEGENDS**

When specifying legended buttons, submit a legend order sheet to cover each listing. To insure proper legend orientation, AML housings (when viewed from the panel front) should have the "MICRO SWITCH" identification facing UP on square devices and UP or to the LEFT on rectangular.

Button legend order sheets are shown on the following pages. Reproduce them on your office copier.




<b>Legend Sheet</b>	<b>Form No.</b>
AML51 Pushbuttons	FO-63394
AML51 Lens buttons	FO-63395
AML52 Pushbuttons	FO-63504
AML53 Paddle switch covers	FO-63567
AML55 Paddle switch covers	FO-63565
AML54 Rockers	FO-63566
AML56 Rockers	FO-63564

\*\* Not available with projected color.  
 \*\*\*\* Insert is clear for projected color when "W" is used.

# Buttons for Switches and Indicators

**AML52 BUTTON ORDER GUIDE** (All possible color combinations may not be available.)

For AML12, AML22 (w/o light pipe), AML32, AML42 LED display.

AML52-N	10	R
Button Type	Display/Legend Type	Button Color
<p>For LED Devices AML52-C</p>  <p>AML52-A*</p> 	<p>Transmitted Color</p> <p>10 No Legend</p> <p>20 With Legend</p>	<p>R Red</p> <p>Y Yellow</p> <p>G Green</p> <p>B Blue</p> <p>W White</p> <p>K Black</p> <p>A Amber</p> <p>L Gray</p>
<p>For AML32 Neon Devices AML52-N</p> 		

Examples:  
**AML52-N10R**  
 Rectangular full screen; for use on neon power switch with transmitted color, no legend; red button.

**AML52-C10K**  
 Square full screen; for use with LED device; transmitted color, no legend; black button.

Manuals

## AML 52/57 Pushbutton Legend Sheet/Product Specification for L.E.D. & Neon Button

Account No \_\_\_\_\_ Page \_\_\_\_\_ of \_\_\_\_\_

Catalog Listing  
**AML52** — Customer Dwg. No. \_\_\_\_\_  
 Customer P.O. No. \_\_\_\_\_ Line Number \_\_\_\_\_ Schedule No. \_\_\_\_\_  
 MICRO SWITCH Sales Order

Customer: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 \_\_\_\_\_ (city) \_\_\_\_\_ (state)

LEGEND ORDER GUIDE											
Button: Type Orientation	Figure NO	Max Lines			Max Characters			5/16	5/16	5/16	
		5/64	7/64	9/64	13/64	5/64	7/64				9/64
	<b>1</b>	3	2	1	1	1	1	7	5	3	1
	<b>2</b>	3	2	1	1	1	1	7	5	3	1
	<b>3</b>	1	1	0	0	0	0	12	10	0	0
	<b>4</b>	1	1	0	0	0	0	12	10	0	0
	<b>5</b>	3	2	1	1	1	1	7	5	4	3
	<b>6</b>	3	2	1	1	1	1	7	5	4	3

### Instructions

- Fill in appropriate catalog listing - one listing/sheet.
- Check proper figure #, Type size, type color.
- Fill in quantity required.
- Indicate legends desired — Do not exceed maximums shown in legend order guide.

### Note

- For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
- Please use black ink in filling out this form to help us process your order.

### Standard Legend Placement

- Transmitted Color — Legend on outer shell (Button)
- Figures 3 and 4 not applicable for AML57 listings

### LEGEND ORDER CHART

Customer Part NO	Fig NO	Type Size			Ink Color	Button Qty	Legend Description					
		5/64	7/64	9/64			13/64	5/16	Sequence: 1st Line	2nd Line	3rd Line	

Sheet Prepared By: \_\_\_\_\_ (Signature) \_\_\_\_\_ (Date)

FO-65604-D

Modified Gothic													
.	,	:	;	!	?	'	-	"	/	(	)	*	&
\$	¢	#	%	o	+	-	±	÷	x	=	≠	>	<
→	↑	↓	←	↖	↗	↘	↙	↕	↔	↞	↠	↡	↢

**SPECIAL LEGENDS**

NOTE: Use this area to show special Legend Locations or Configurations NOT shown above. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "A" \_\_\_\_\_ Fig. "B" \_\_\_\_\_

Honeywell


AML Pushbutton Legend Sheet/Product Specification

Account NO 126 - 284 Page \_\_\_\_ of \_\_\_\_

LEGEND ORDER GUIDE

Button: Type Orientation	Figure NO	Max Lines/Area			Max Characters/Line		
		5/64	7/64	9/64	13/64	5/16	5/16
1 A*B PR	1	4*3	3*2	2*1	5*4	5*3	1*1
1 C	2	4*3	3*2	2*1	5*4	5*3	1*1
1 D	3	1*1	1*1	0*0	7*5	5*4	0*0
1 E,H*	4	4*3	3*2	2*1	11*10	9*8	5*3
1 E,H*	5	6*6	4*4	3*3	7*5	5*4	3*1
1 F	6	4*3	3*2	2*1	11*10	9*8	5*3
1 F	7	6*6	4*4	3*3	7*5	5*4	3*1
1 G,N	8	1*1	1*1	0*0	11*10	9*8	0*0
1 M	9	5*0	4*0	3*0	8*0	6*0	3*0

Definitions of Markings



Standard Legend Placement -

- Use special legends sec. for other placements
- 1. Transmitted Color - Legend on outer shell (Button)
- 2. Dead Front - Legend on Insert
- 3. Projected Color - Legend on outer shell (Button)
- 4. Transmitted color with clear cap legend on insert

LEGEND ORDER CHART

Customer Part No	Fig No	Type Size		Ink Color		But- ton Qty
		5/64	7/64	9/64	13/64	
						1
						2
						1
						2
						1
						2
						1
						2

Catalog Listing  
**AML51** -  
 Customer P.O. No. \_\_\_\_\_ Customer Dwg. No. \_\_\_\_\_  
 MICRO SWITCH Sales Order \_\_\_\_\_ Line Number \_\_\_\_\_ Schedule No. \_\_\_\_\_

Customer: \_\_\_\_\_  
 Address: \_\_\_\_\_ (city) \_\_\_\_\_ (state) \_\_\_\_\_

Instructions

1. Fill in appropriate catalog listing - one listing/sheet.
2. Check proper figure #, Type size, Type color.
3. Fill in quantity required.
4. Indicate legends desired - Do not exceed maximums shown in legend order guide.

Note

1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
2. Please use black ink in filling out this form to help us process your order.
3. \* INSERT ONLY ON STYLE A & H BUTTON

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.

A3

STANDARD SYMBOLS AVAILABLE

.	:	;	!	?	'	-	"	/	(	)	*	&
\$	¢	#	%	o	+	-	±	÷	x	=	≠	>
→	↔	↓	↙	↘	↖	↗	↕	↔	↔	↔	↔	↔

**SPECIAL LEGENDS**  
 NOTE: Use this area to show special Legend Locations or Configurations NOT shown to the left. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "A" \_\_\_\_\_ Fig. "B" \_\_\_\_\_

Sheet prepared by: \_\_\_\_\_

(Signature)

(Date)

Manuals

**Honeywell**

**AML Lens Legend Sheet/Product Specification**

Account No \_\_\_\_\_ Page \_\_\_\_\_ of \_\_\_\_\_

Catalog Listing  
**AML51** —  
Customer P.O. No. \_\_\_\_\_ Customer Dwg. No. \_\_\_\_\_  
MICRO SWITCH Sales Order \_\_\_\_\_ Line Number \_\_\_\_\_ Schedule No. \_\_\_\_\_  
Customer: \_\_\_\_\_  
Address: \_\_\_\_\_ (city) \_\_\_\_\_ (state) \_\_\_\_\_

**LEGEND ORDER GUIDE**

Button: Type Orientation	Figure No	Max Lines			Max Characters									
		5/64	7/64	9/64	13/64	5/16	5/16							
AREA 1 J	1	4	3	3	2	2	1	14	11	10	7	6	3	3
AREA 1 K	2	4	3	3	2	2	1	6	5	5	3	3	1	1
AREA 1 2 3 L	3	4	3	3	3	2	1	4	3	3	3	2	1	1
AREA 1 J	4	4	3	3	3	3	2	9	7	6	4	3	2	2
AREA 1 2 K	5	3	2	2	2	1	1	8	7	6	4	3	2	2
AREA 2 3 L	6	2	2	1	1	1	0	8	7	6	4	3	0	0

**Standard Legend Placement**

1. Transmitted Color — Legend on outer shell (Button)
2. Dead Front - Legend on Insert
3. Projected Color - Legend on outer shell (Button)

**Instructions**

1. Fill in appropriate catalog listing - one listing/sheet.
2. Check proper figure #, type size, type color.
3. Fill in quantity required.
4. Indicate legends desired — Do not exceed maximums shown in legend order guide.

**Note**

1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
2. Please use black ink in filling out this form to help us process your order.

**LEGEND ORDER CHART**

Customer Part No	Fig No	Type Size	Ink Color	But ton Qty	Legend Description			
					Sequence: Left-to-Right or Top-to-Bottom	3rd Line	4th Line	
	1				1st Line	2nd Line	3rd Line	4th Line
	2							
	3							
	1							
	2							
	3							
	1							
	2							
	3							

**A3**  
Modified Gothic

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.

.	,	;	!	?	'	"	-	/	(	)	*	&
\$	¢	#	%	o	+	-	±	+	x	=	≠	<
→	↑	↓	←	CR	1/4	1/2	3/4	1/3	2/3	@	∞	

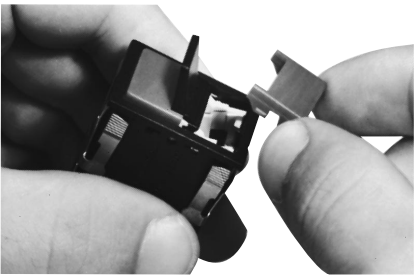
**SPECIAL LEGENDS**

NOTE: Use this area to show special Legend Locations or Configurations NOT shown above. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "A" \_\_\_\_\_ Fig. "B" \_\_\_\_\_

Sheet Prepared By: \_\_\_\_\_ (Signature) \_\_\_\_\_ (Name)

FO-63395-E



Colored covers simply snap into the top of paddle switch housings.

**COLOR DISPLAY OPTIONS**

Transmitted color — Color is displayed whether lamp is On or Off. Choice of 1-piece covers (types 10 or 20) or covers with clear cap and colored translucent insert (types 11 or 12).

Projected color — Translucent white cover with transparent colored insert (types 50 or 60). White cover appears colored when illuminated.

Dead front hidden color/hidden legend — Cover appears black with lamp Off. Legend and color appear when illuminated (types 30 or 40).

**AMLS3 PADDLE SWITCH COVER ORDER GUIDE** (All possible color combinations may not be available.)

For AML13, AML23, and AML33 incandescent or non-lighted display.

AMLS3-T	10	R	G																																		
<b>Paddle Switch Cover Type</b>   <b>AMLS3-E</b> 1/2 Cover   <b>AMLS3-T</b> Two-Piece Cover	<b>Display/Legend Type</b>  <b>Transmitted Color</b> 10 No legend 20 With legend on cap  <b>Transmitted Color</b> (Clear cap and color insert) 11 No legend 21 With legend on insert  <b>Dead Front</b> (Smoky gray cap and color insert) 30 No legend 40 With legend on insert  *** <b>Projected Color</b> (White cap and color insert) 50 No legend 60 With legend on cap	<b>Cover Color</b>  <table border="1"> <thead> <tr> <th>1/2 cover, or one side of two-piece cover</th> <th>Other side of two-piece cover (see note)</th> </tr> </thead> <tbody> <tr><td>R</td><td>R</td></tr> <tr><td>Red</td><td>Red</td></tr> <tr><td>Y</td><td>Y</td></tr> <tr><td>Yellow</td><td>Yellow</td></tr> <tr><td>G</td><td>G</td></tr> <tr><td>Green</td><td>Green</td></tr> <tr><td>B</td><td>B</td></tr> <tr><td>Blue</td><td>Blue</td></tr> <tr><td>***W</td><td>***W</td></tr> <tr><td>White</td><td>White</td></tr> <tr><td>K*</td><td>K*</td></tr> <tr><td>Black</td><td>Black</td></tr> <tr><td>L*</td><td>L*</td></tr> <tr><td>Gray</td><td>Gray</td></tr> <tr><td>A**</td><td>A**</td></tr> <tr><td>Amber</td><td>Amber</td></tr> </tbody> </table>		1/2 cover, or one side of two-piece cover	Other side of two-piece cover (see note)	R	R	Red	Red	Y	Y	Yellow	Yellow	G	G	Green	Green	B	B	Blue	Blue	***W	***W	White	White	K*	K*	Black	Black	L*	L*	Gray	Gray	A**	A**	Amber	Amber
1/2 cover, or one side of two-piece cover	Other side of two-piece cover (see note)																																				
R	R																																				
Red	Red																																				
Y	Y																																				
Yellow	Yellow																																				
G	G																																				
Green	Green																																				
B	B																																				
Blue	Blue																																				
***W	***W																																				
White	White																																				
K*	K*																																				
Black	Black																																				
L*	L*																																				
Gray	Gray																																				
A**	A**																																				
Amber	Amber																																				

Note: Only one color code letter is necessary when ordering 1/2 covers.

Example: **AMLS3-T10RG**  
 Two-piece cover; with transmitted color, no legend; red and green.

\* Not for lighted display.  
 \*\* Not available with projected color.  
 \*\*\* Insert is clear for projected color when "W" is used.

Manuals

**AMLS5 PADDLE SWITCH COVER ORDER GUIDE** (All possible color combinations may not be available.)

For AML35 neon display.

AMLS5-N	10	R	Y
<b>Paddle Switch Cover Type</b>   <b>AMLS5-N</b> Full Neon Cover, with colored lens	<b>Display/Legend Type</b>  <b>Transmitted Color</b> 10 No Legend  20 With Legend	<b>Lens Color</b>  T Clear  R Red	<b>Cover Color</b>  R Red Y Yellow G Green B Blue W White K Black L Gray

AMLS5-N covers have a colored lenticular lens window which extends over the neon lamp.




Example: **AMLS5-N10RY**  
 Full neon paddle switch cover; with transmitted color, no legend; red lens and yellow cover.

# Covers for Paddle Switches

**AML55 PADDLE SWITCH COVER ORDER GUIDE** (All possible color combinations may not be available.)

For AML15 and AML25 LED display.

See notes below

AML55-T	10	Y	R
<b>Paddle Switch Cover Type</b>  AML55-E 1/2 Cover (For one LED)*	<b>Display/Legend Type</b> Transmitted Color 10 No Legend 20 With Legend	<b>Cover Color – See notes below</b>	
 AML55-T Two-Piece Cover (For one LED)		<b>1/2-cover, or LED side of two-piece covers*</b>	<b>Other side of two piece covers</b>
 AML55-H Two-Piece Cover (For two LED's)		R Red Y Yellow G Green B Blue W White K Black L Gray	R Red Y Yellow G Green B Blue W White K Black L Gray

## HOW TO ORDER LEGENDS FOR PADDLE SWITCH COVERS

When specifying legended paddle switch covers, submit a legend order sheet to cover each catalog listing. These forms identify the maximum number of lines per area and the maximum characters per line, based on the type size you request.

To insure proper legend orientation, paddle switch housings (when viewed from the panel front) should have the "MICRO SWITCH" identification facing UP or to the LEFT.

Legend order sheets for covers are shown on the following pages. Reproduce them on your office copier or request a pad of them from the 800 number:

<b>Legend Sheet</b>	<b>Form No.</b>
AML53 Covers	FO-63567
AML55 Covers	FO-63565

AML55-E, -T, and -H covers have an open window which allows LED's to be flush with the cover surface.

- \* Notes:  
<sup>1</sup> Only one color code letter is necessary for AML55-E 1/2 covers.  
<sup>2</sup> To order a 1/2-cover without the LED "window," specify an AML53-E listing from the previous page.

Example: **AML55-T10YR**  
 Two-piece cover; with LED window in one side, transmitted color, no legend; yellow (LED side) and red (non-LED side).



## AML Paddle Operator (Cover) Legend Sheet/Product Specification

Page \_\_\_ of \_\_\_

Account NO 126 - 284

Catalog Listing  
**AML53** -

Customer P.O. No. \_\_\_\_\_ Customer Dwg. No. \_\_\_\_\_

MICRO SWITCH Sales Order \_\_\_\_\_ Line Number \_\_\_\_\_ Schedule No. \_\_\_\_\_

Customer: \_\_\_\_\_ (city) \_\_\_\_\_ (state) \_\_\_\_\_

Address: \_\_\_\_\_

### Instructions

1. Fill in appropriate catalog listing - one listing/sheet.
2. Check proper figure #, Type size, Type color.
3. Fill in quantity required.
4. Indicate legends desired — Do not exceed maximums shown in legend order guide.

### Note

1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
2. Please use black ink in filling out this form to help us process your order.

### LEGEND ORDER GUIDE

Button: Type Orientation	Figure No	Max Lines/Area			Max Characters/Line			
		5/64	7/64	9/64	13/64	5/16	13/64	5/16
AREA 1 E	1	2	1	1	1	1	1	1
		2	1	1	1	1	1	1
		2	1	1	1	1	1	1
AREA 1 E	2	2	1	1	1	1	1	1
		2	1	1	1	1	1	1
		2	1	1	1	1	1	1
AREA 2 T	3	2	1	1	1	1	1	1
		2	1	1	1	1	1	1
		2	1	1	1	1	1	1

Standard Legend Placement - 1. Transmitted Color—Legend on outer shell (Button)

Use Special Legends Section 2. Dead Front—Legend on insert

for other placements. 3. Projected Color - Legend on outer shell (Button)

4. Transmitted color with color with clear cap legend on insert.

5. All legends will be centered within the legendable areas

### LEGEND ORDER CHART

Customer Part No	Fig No	Type Size		Ink Color		But- ton Qty	Area 1		Area 2	
		5/64	7/64	9/64	13/64		5/16	Black	White	1st Line
							Sequence: Left-to-Right or Top-to-Bottom	1st Line	2nd Line	

FO-65567-F

(Signature)

(Date)

Manuals

Modified Gothic lettering (A thru Z), numerals (0 thru 9), and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.

**A3** Modified Gothic

STANDARD SYMBOLS AVAILABLE

·	;	!	?	'	—	"	/	(	)	*	&
\$	¢	%	o	+	-	±	÷	x	=	≠	<
→	↔	↵	↶	↷	↸	↹	↺	↻	∞		

**SPECIAL LEGENDS**

NOTE: Use this area to show special Legend Locations or Configurations NOT shown above. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "A" \_\_\_\_\_ Fig. "B" \_\_\_\_\_

**Honeywell**

**AML Paddle (Cover) Legend Sheet For LED and Neon Style/Product Specification**

Page \_\_\_\_\_ of \_\_\_\_\_

Account NO 126-284

Catalog Listing **AML55** -

Customer P.O. No.	Customer Dwg. No.	Schedule No.
MICRO SWITCH Sales Order		
Line Number		

Customer: \_\_\_\_\_

Address: \_\_\_\_\_

(city) \_\_\_\_\_ (state) \_\_\_\_\_

Legend Order Guide																				
Cover Type Orientation	Figure No	Max Lines/Area			Max Characters/Line			Side 1	Side 2											
		5/64	7/64	9/64	13/64	5/16	5/64				7/64	9/64	13/64	5/16						
	1	1	1	1	0	0	7	5	5	0	0									
	2	1	1	1	0	0	7	5	5	0	0									
Side 1: Side 2:	3	1	1	1	0	0	7	5	5	0	0									
Side 1: Side 2:	4	2	2	2	1	1	7	5	5	3	1									
Side 1: Side 2:	5	1	2	2	0	1	7	5	5	0	1									

**Instructions**

- Fill in appropriate catalog listing - one listing/sheet.
- Check proper figure #, Type size, Type color.
- Fill in quantity required.
- Indicate legends desired — Do not exceed maximums shown in legend order guide.

**Note**

- For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
- Please use black ink in filling out this form to help us process your order.

**SPECIAL LEGENDS**

NOTE: Use this area to show special Legend Locations or Configurations NOT shown below. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "A"	Fig. "B"
----------	----------

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.

**A3**

Modified Gothic

STANDARD SYMBOLS AVAILABLE											
·	,	:	;	!	?	'	—	"	/	*	&
\$	¢	#	%	o	+	-	±	÷	x	=	>
→	↑	↓	←	CR	1/4	1/2	3/4	1/3	2/3	@	∞

Standard Legend Placement — Use Special Legends Section for other placements.

1. All Legends will be centered within the legendable areas

**LEGEND ORDER CHART**

Customer Part No	Fig No	Type Size	Ink Color		But ton Qty	Area 1		Area 2	
			5/64	7/64		9/64	13/64	5/16	5/64
						1st Line	2nd Line	1st Line	2nd Line

(Signature)

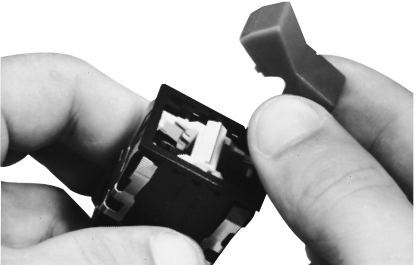
(Date)

FO-63565-C

# Manual Switches

## Rocker Switch Operators

### COLOR DISPLAY OPTIONS



Rocker operators are assembled to the switches by simply snapping them into recesses in the switch operator sockets.

**Transmitted color** — Color is displayed whether lamp is On or Off. Choice of 1-piece rockers (types 10 or 20) or rockers with clear cap and colored translucent insert (types 11 or 12).

**Dead front hidden color/hidden legend** — Rocker appears black with lamp Off. Legend and color appear when illuminated (types 30 or 40).

**Projected color** — Translucent white rocker with transparent colored insert (types 50 or 60). White rocker appears colored when illuminated.

### AML54 ROCKER OPERATOR ORDER GUIDE (All possible color combinations may not be available.)

For AML14, AML24, AML34 incandescent or non-lighted display.

AML54-F	10	R	
Rocker Operator Type	Display/Legend Type	Rocker Color – See Note Below	
		Full rocker, 1/2 rocker, or one side of two-piece rockers	Other side of two-piece rockers
<b>AML54-F</b>  Full Rocker	<b>Transmitted Color</b> 10 No legend 20 With legend on cap  <b>Transmitted Color</b> (Clear cap and color insert) † 11 No legend 21 With legend on insert	<b>R</b> Red <b>Y</b> Yellow <b>G</b> Green <b>B</b> Blue <b>***W</b> White <b>K*</b> Black <b>L*</b> Gray <b>A**</b> Amber	<b>R</b> Red <b>Y</b> Yellow <b>G</b> Green <b>B</b> Blue <b>***W</b> White <b>K*</b> Black <b>L*</b> Gray <b>A**</b> Amber
<b>AML54-E</b>  1/2 Rocker	<b>Dead Front †</b> (Smoky gray cap and color insert) 30 No legend 40 With legend on insert		
<b>AML54-T</b>  Two-Piece Rocker	<b>***Projected Color †</b> (White cap and color insert) 50 No legend 60 With legend on cap		

NOTE: AML54-F10 and AML54-F20 are one-piece, one-color full rockers. Thus only one color code letter is necessary when ordering. Include a two letter code for all other AML54-E (and AML54-T) catalog listings.

\* Not for lighted display.  
 \*\* Not available with projected color or dead front.  
 \*\*\* Insert is clear for projected color when "W" is used.  
 † Not available for use with AML34 power switches.

Example: **AML54-F10R**  
 Full rocker; with transmitted color, no legend; red.

Manuals

### AML56 ROCKER OPERATOR ORDER GUIDE

For AML36 neon display.

AML56-N	10	R	Y
Rocker Operator Type	Display/Legend Type	Lens Color	Rocker Color
<b>AML56-N</b>  Full Rocker with Colored Lens	<b>Transmitted Color</b> 10 No Legend  20 With Legend	<b>T</b> Clear <b>R</b> Red <b>Y</b> Yellow	<b>R</b> Red <b>Y</b> Yellow <b>G</b> Green <b>B</b> Blue <b>W</b> White <b>K</b> Black

AML56-N rockers have a colored lenticular lens window which extends over the neon lamp.




Example: **AML56-N10RY**  
 Full rocker; with transmitted color, no legend; yellow rocker and red lens.

# Manual Switches

## Rocker Switch Operators

### AML56 ORDER GUIDE

For AML16 and AML26 LED display.

AML56-T	10	R	B
<b>Rocker Operator Type</b> <b>AML56-E</b>  1/2-Rocker* (For one LED)	<b>Display/Legend Type</b> <b>Transmitted Color</b> 10 No Legend 20 With Legend	<b>Rocker Color – See Notes Below</b>	
<b>AML56-T</b>  Two-Piece Rocker (For one LED)		<b>1/2-rocker or LED side of two-piece rockers</b>	<b>Other side of two piece rockers</b>
<b>AML56-H</b>  Two-Piece Rocker (For two LED's)		R Red Y Yellow G Green B Blue W White K Black L Gray	R Red Y Yellow G Green B Blue W White K Black L Gray

Example: **AML56-T10RB**  
 Two-piece rocker; with LED window in one side, transmitted color, no legend; red (LED side) and blue (non-LED side).

- \* Notes:
- Only one color code letter is necessary for AML56-E 1/2-rockers. AML56-E, -T, and -H rockers have an open window which allows LEDs to be flush with the rocker surface.
  - To order a 1/2-rocker without the LED "window," specify an AML54-E listing from the previous page.

### HOW TO ORDER ROCKER LEGENDS

When specifying legended rockers, submit a legend order sheet to cover each catalog listing. These forms identify the maximum number of lines per area and the maximum characters per line, based on the type size you request. To insure proper legend orientation, rocker switch housings (when viewed from the panel front) should have the "MICRO SWITCH" identification facing UP or to the LEFT.

Rocker legend order sheets are shown on the following pages. Reproduce them on your office copier.

<b>Legend Sheet</b>	<b>Form No.</b>
AML54 Rockers	FO-63566
AML56 Rockers	FO-63564

Rocker Legend Sheet

Honeywell

AML Rocker Legend Sheet/Product Specification

Page \_\_\_ of \_\_\_

Account NO 126-284

Legend Order Guide												
Button Type Orientation	Figure No	Max Lines/Area			Max Characters/Line			Button Filter	Area 1	Area 2	1st Line	2nd Line
		5/64	7/64	9/64	13/64	5/16	5/64					
AREA 1	E	1	2	2	2	1	1	1	0	Button		
AREA 1	E	2	2	2	2	1	1	1	0	Filter		
AREA 2	F	3	2	2	2	1	1	1	0			
AREA 2	T	4	2	2	2	1	1	1	0			

Standard Legend Placement - 1. Transmitted Color—Legend on outer shell (Button)  
 Use Special Legends Section \*2. Dead Front—Legend on insert  
 for other placements. \*3. Projected Color - Legend on outer shell (Button)  
 \*4. Transmitted color with clear cap legend on insert.  
**\*NOT AVAILABLE WITH AML 34 SERIES**  
 5. All legends will be centered within the legendable areas.

LEGEND ORDER CHART

Customer Part No	Fig No	Type Size			Ink Color			But- ton Qty	Area 1 Sequence: Left-to-Right or Top-to-Bottom	
		5/64	7/64	9/64	13/64	5/16	Black		White	1st Line

FO-63566-F

(Signature)

(Date)

Manuals

Catalog Listing  
**AML54** - Customer P.O. No. \_\_\_\_\_ Customer Dwg. No. \_\_\_\_\_  
 Line Number \_\_\_\_\_ Schedule No. \_\_\_\_\_  
 MICRO SWITCH Sales Order

Customer: \_\_\_\_\_  
 Address: \_\_\_\_\_ (city) \_\_\_\_\_ (state) \_\_\_\_\_

Instructions

1. Fill in appropriate catalog listing - one listing/sheet.
2. Check proper figure #, Type size, Type color.
3. Fill in quantity required.
4. Indicate legends desired — Do not exceed maximums shown in legend order guide.

Note

1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
2. Please use black ink in filling out this form to help us process your order.

SPECIAL LEGENDS

NOTE: Use this area to show special Legend Locations or Configurations NOT shown below. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "A"

Fig. "B"

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.	<b>A3</b> Modified Gothic
STANDARD SYMBOLS AVAILABLE	
. , : ; ! ? ' - " / ( ) * &	
\$ © # % ° + - ± × = ≠ > <	
→ ↑ ↓ ← CR 1/4H/2/3/4/1/3 2/3 @ ∞	

Honeywell

**AML Rocker Legend Sheet/Product Specification**

Account NO 126-284 Page      of     

Catalog Listing <b>AML56</b> -		Customer Dwg. No.
Customer P.O. No.		Schedule No.
MICRO SWITCH Sales Order	Line Number	

Customer: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 \_\_\_\_\_ (city) \_\_\_\_\_ (state)

- Instructions**
1. Fill in appropriate catalog listing - one listing/sheet.
  2. Check proper figure #, Type size, Type color.
  3. Fill in quantity required.
  4. Indicate legends desired — Do not exceed maximums shown in legend order guide.

**Note**

1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
2. Please use black ink in filling out this form to help us process your order.

Legend Order Guide														
Button Type Orientation	Figure No	Max Lines/Area			Max Characters/Line			AREA 1	AREA 2	AREA 3				
		5/64	7/64	9/64	13/64	5/16	7/64				9/64	13/64	5/16	
1 E	1	1	1	1	0	0	7	5	5	3	0			
1 E	2	1	1	1	0	0	7	5	5	3	0			
1 H	3	1	1	1	0	0	7	5	5	3	0			
2 N	4	2	2	2	1	1	7	5	5	3	1			
2 T	5	1	2	2	1	1	7	5	5	3	1			

Standard Legend Placement - 1. All legends will be centered within the legendable areas.  
 Use Special Legends Section for other placements.

**SPECIAL LEGENDS**

NOTE: Use this area to show special Legend Locations or Configurations NOT shown below. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "A" \_\_\_\_\_ Fig. "B" \_\_\_\_\_

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.	<b>A3</b>	Modified Gothic
STANDARD SYMBOLS AVAILABLE		
. , : ; ! ? ' " _ / ( ) * &		
\$ ¢ # % 0 + - ± × ÷ ≠ > <		
→ ↑ ← ↘ ↙ ↗ ↖		

LEGEND ORDER CHART														
Customer Part No	Fig No	Type Size		Ink Color		But- ton Qty	Area 1 Sequence: Left-to-Right or Top-to-Bottom			Area 2				
		5/64	7/64	9/64	13/64		5/16	Black	White		1st Line	2nd Line		

FO-89664-E \_\_\_\_\_ (Signature) \_\_\_\_\_ (Date)